



SCAN →



全国热线
0086-137-7777-7719
ZHEJIANG ZHENGXIN
MACHINERY CO.,LTD
浙江正信机械有限公司

浙江省平阳县万全工业区兴隆路118号
NO.118 XingLong Road, WanQuan Industrial Zone,
PingYang County, Zhejiang Province, CHINA.
Tel. 0086-577-6383 9988
Fax. 0086-577-6355 6008 **QQ.** 353547135
E-mail. zx@zjzxjx.cn **Web.** www.zjzxjx.cn

Flachgelegt
gehöre ich
zum Altpapier.
Danke.



When laid flat,
I belong
in recycling paper.
Thanks.





无纺布平口袋
Non Woven D-cut Bag



无纺布立体袋
Non Woven Box Bag



无纺布手提袋
Non Woven Handle Bag



无纺布背心袋
Non Woven T-shirt Bag



为无纺布制袋行业打开新机遇之门
Open the door of new opportunity
for non woven fabric bag making industry



BRIEF INTRODUCTI 企业简介

浙江正信机械有限公司坐落在中国海滨城市温州平阳，成立于2014年6月9日，经浙江省温州市平阳县市场监督管理局批准，统一信用代码为：91330326307338813，注册资本：1000万。现有员工150人。占地面积30000平方米。是一家技术力量和经济实力科技型企业。主要生产无纺布制袋机、无纺布印刷机、无纺布丝网印刷机、无纺布横切机、无纺布分切机、无纺布烫把机等各种无纺布袋成套设备系列的厂家。拥有一批中、高级技术人才（本科20人，专科25人），技术力量雄厚，具有设计、开发、生产、安装、服务完整的运行体系，并通过了ISO9001质量体系认证，CE国际质量体系认证。并于2019年通过省各相关部门审核，荣获《高新企业证书》，属同行业翘楚。

正信机械深受政府相关部门重视和爱护，并于2019年成立了中共党支部，成立了工会组织。

本公司始终坚持“诚信、优质、创新、进取”的经营理念，以质量求生存，以科技求发展。每年参加线上线下产品展览会几十次，获得各国广大客户的高度赞扬！（正信机械）员工有着多年制造印刷塑料包装机械的经验，同时吸收了国外的先进技术和工艺。大大提高了印刷制品的品质及高生产效率。保证了设备的稳定性和耐用性。保养维护非常方便。产品远销中东、东南亚等50多个国家和地区，深受广大用户一致好评。

本公司最大的优势：有一支庞大的售后服务团队，我们的调试人员可随时调遣，奔赴任何国家、地区，帮助客户解决一切机器操作上的疑点、难点，直至客户正常生产为止。

本公司有着优良的企业文化，制度化管、人性化管理，以人为本。给员工创造干净、舒适、宽松、优雅的工作环境。各种办公、教育、生产、绿化、娱乐等硬件配套设施及时跟进。福利优厚。秉承感恩的心做人，负责任的心做事。上至老板，下至员工，都有一颗赤城的心，团结一致，互敬互爱，本着共享共赢的理念。目标一致，携手共进。

正信机械严格遵循企业宗旨，以诚为本，热烈欢迎国内外各界朋友的光临，互惠互助，共谋发展大业。

主营产品：无纺布制袋机，无纺布生产线，丝网印刷机，口罩机，烫把机，横切机，分切机。

Zhejiang Zhengxin Machinery Co., Ltd. is located in Pingyang, Wenzhou, a coastal city of China. It was founded on June 9, 2014 and approved by The Market Supervision Administration of Pingyang County, Wenzhou, Zhejiang Province. The unified credit code is 91330326307338813 with a registered capital of RMB 10 million. The company has 150 employees. It covers an area of 30,000 square meters.

This is a technology strength and economic strength of science and technology-oriented enterprises. The main production of non woven bag machine, non woven printing press, non woven screen printing press, non woven cross-cutting machine, non woven cutting machine, non woven hot machine and other non woven bag complete sets of equipment series manufacturers. With a group of middle and senior technical personnel (undergraduate 20 people, 25 specialists), strong technical force, with design, development, production, installation, service complete operating system, and through the ISO9001 quality system certification, CE international quality system certification. And in 2019 through the provincial departments audit, won the "high-tech enterprise certificate", is the industry leader.

Zhengxin Machinery is highly valued and loved by the relevant government departments, and in 2019 set up the Party branch of the Communist Party of China, the establishment of trade union organizations.

The Company has always adhered to the "integrity, high-quality, innovative, enterprising" business philosophy, to the quality of survival, science and technology for development. Every year to participate in the online and ofine product exhibition dozens of times, access to the vast number of customers in various countries highly praise! [Zhengxin Machinery] employees have many years of experience in the manufacture of printed plastic packaging machinery, while absorbing foreign advanced technology and technology. Greatly improve the quality of printed products and high production efficiency. The stability and durability of the equipment are guaranteed. Maintenance is very convenient. Products are exported to the Middle East, Southeast Asia and other more than 50 countries and regions, by the vast number of users alike.

The Company's biggest advantage: there is a huge after-sales service team, our commissioning personnel can be dispatched at any time, to any country, region, to help customers solve all the machine operation of doubts, difficulties, until the normal production of customers.

The Company has an excellent corporate culture, institutionalized management, humane management, people-oriented. Create a clean, comfortable, relaxed and elegant working environment for our employees. A variety of office, education, production, greening, entertainment and other hardware facilities to follow up in a timely manner. The benefits are generous. Adhering to the grateful heart to be a person, the responsibility of the heart to do things. Up to the boss, down to the staff, have a red city heart, unity, mutual respect and love, the spirit of sharing the concept of win-win situation. The goal is the same, hand in hand.

Zhengxin Machinery factory strictly follow the enterprise tenet, take honestly as this, warmly welcome friends from all walks of life both at domestic and abroad for our mutual benefits and assistance, and seek common development cause.

Main products: non woven bag machine, non woven production line, screen printing press, mask machine, ear loop welding machine, cross-cutting machine, slitting machine.



ISO9001
2008



International
Automotive
Task Force



TODAY, WE ARE
MOVING TOWARDS
A BETTER AND
SUSTAINABLE FUTURE

今天，我们正迈步走向
一个更加美好、
可持续发展的未来





**MOVING FORWARD
WITH PURPOSE AND
RESPONSIBILITY**

心怀远大抱负，肩负企业
责任，昂首阔步向前



OUR JOURNEY
BEGINS NOW

我们的旅途从此刻开始

DEVELOPMENT PROCESS

正信成长之路

我们在无纺布制袋行业的丰富经验，保证了客户每一个新项目得到全面有效的解决方案。无论是何种类型的无纺布袋，外型设计及大小，我们均可为您的品牌产品提供最佳的无纺布制袋方案，并与您携手共进，作出正确之选择。

Our extensive experience in the non woven bag industry guarantees that our customers get comprehensive and effective solutions for each project. No matter what type of non woven bag, design and size, we can provide the best non woven bag solution for your brand products, and work with you to make the right choice.



2009

FOUNDING ORIGIN
创始起源

正式创建浙江正信机械有限公司
Formally established Zhejiang Zhengxin Machinery Co., Ltd.



2011

RECEIVE HONOR
获得荣誉

通过ISO9001质量体系认证
Passed ISO9001 quality system certification



2012

BRAND START
品牌起点

投资百万租赁厂房，创立正信品牌
Invested in million leased plant and established Zhengxin brand



2014

ACCUMULATE
厚积薄发

我们开始海外营销和合作，同时吸收国外的先进技术和工艺
We started overseas marketing and cooperation, while absorbing foreign advanced technologies and processes



2017

STEADY DEVELOPMENT
稳定发展

我们建立了更多的大团队，把公司的规模扩大了一倍
We build more big team, we double the size of the company



2018

PURSUIT OF EXCELLENCE
追求卓越

我们不断创新，建立自己的DP中心
We keep doing innovation, build our own DP center



2020

SUSTAINABLE DEVELOPMENT
持续发展

研发出第十四代一次成型立体袋制袋机
Developed the fourteenth generation primary shaping non woven box bag making machine



2021

LOOKING FORWARD TO THE FUTURE
展望未来

我们一直努力工作，从未停止前进……
We have been working hard and never stopped moving forward...

BEST NON WOVEN BAG MAKING EQUIPMENT


打造最佳无纺布制袋设备

EQUIPMENT DEVELOPMENT PROCESS

设备创新之路

十几年来，我们一直致力于提供最好的智能化无纺布制袋解决方案。
通过创意设计、不懈的研发和对最新制造工艺的持续投资，
我们相信，正信的无纺布制袋设备确实象征着行业内的完美设备。

For more than ten years, we have been committed to provide the best intelligent non woven bag manufacturing solutions. Through creative design, relentless research and development, and continued investment in the latest manufacturing processes, We believe that zhengxin's non-woven bag making equipment symbolizes the perfect equipment in the industry.

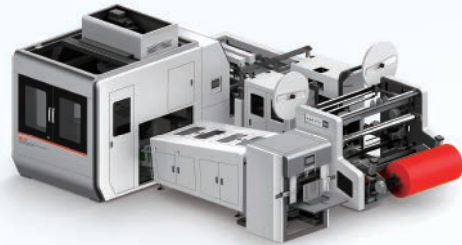

一次成型立体袋制袋机
Non Woven Box Bag Making Machine

高速度+高稳定性
Higher speed, more stable

生产速度 (Production speed): 80pcs/min
研发日期 (R&D date): 2018.09



一次成型立体袋制袋机
Non Woven Box Bag Making Machine

高效生产
From scratch to efficient

生产速度 (Production speed): 50pcs/min
研发日期 (R&D date): 2016.07



一次成型立体袋制袋机
Non Woven Box Bag Making Machine

目前市场上最先进设备
The most advanced equipment currently on the market

生产速度 (Production speed): 80pcs/min
研发日期 (R&D date): 2019.08



一次成型立体袋制袋机
Non Woven Box Bag Making Machine

自动理袋+自动化
Auto bag collection and full automation


生产速度 (Production speed): 60pcs/min
研发日期 (R&D date): 2017.10



一次成型立体袋制袋机
Non Woven Box Bag Making Machine

人工少+立体折袋
Reduce artificial+three dimensional bag folding

生产速度 (Production speed): 40pcs/min
研发日期 (R&D date): 2015.07

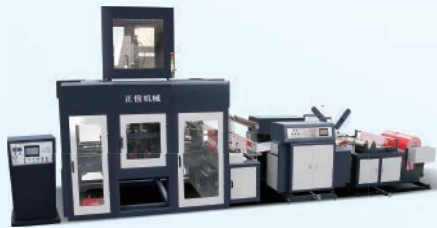

一次成型立体袋制袋机
Non Woven Box Bag Making Machine

从无到有+一次成型
We first to produce the non woven box bag making machine


生产速度 (Production speed): 10pcs/min



一次成型立体袋制袋机
Non Woven Box Bag Making Machine

生产稳定
Stable production

生产速度 (Production speed): 20pcs/min
研发日期 (R&D date): 2013.08

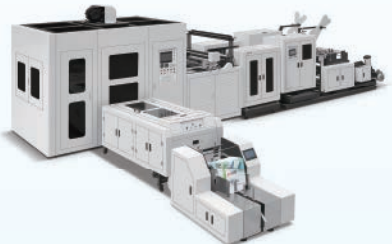

一次成型立体袋制袋机
Non Woven Box Bag Making Machine

电脑自动定位
Computer automatic positioning

生产速度 (Production speed): 30pcs/min
研发日期 (R&D date): 2014.06

2008~2013 第一代到第七代
First To Seventh Generation Leader

2014 第八代
Eighth Generation Leader

2015 第九代
Ninth Generation Leader

2016 第十代
Tenth Generation Leader

2019 第十三代
Thirteenth Generation Leader

2020 第十四代
Fourteenth Generation Leader

2018 第十二代
Twelfth Generation Leader

2017 第十一代
Eleventh Generation Leader



OUR PASSION FOR MECHANICAL ENGINEERING IS OUR MOTIVATION 对机械工程的热爱是我们的动力

正是出于对工程的热爱，我们才能为客户创造出最高品质的产品。我们几乎将所有的要求都转化成了定制的解决方案—对我们来说，客户的要求永远是第一位的。

Our passion for engineering creates top-quality products for the customers. We transform almost every requirement into customize solution, Customer's requirements are the most important.

WORKSHOP

高效管理
Efficient management

研发能力
R&D ability

制造水平
Manufacturing level

可靠测试
Reliable test

ADVANCED INDUSTRIAL MANUFACTURING TECHNOLOGY

先进的工业制造技术

公司不仅有强大的自主研发能力，还通过标准化、精细化的品质管理体系，确保每个零部件的高标准，分类有序的各条装配线，及花巨资引进的各类加工中心，无不显示我们在对无纺布制袋机专业、专注和专一。

Zheng xin company not only has strong independent R&D capacity but also can ensure every component can reach the highest standard through standardized, fine quality management system. The assembly lines that are classified orderly and various CNCs we have purchased with plenty of money also show that we are professional, dedicated and Bag Making Machine

精细化品质管理模式
FINE QUALITY
MANAGEMENT MODE





WE ARE THE SOLID BACKING OF OUR CUSTOMERS

我们是客户的坚实后盾

现如今，制造商对其供应商的服务要求越来越高，已不仅止于备件和随叫随到的技术人员。节节攀升的压力让他们在设备和系统方面的投资达到最大化，现在，他们希望供应商能够提供服务协议、深层检测服务和机器升级、远程诊断和监控、培训课程以及专业的生产过程改进建议——正信在这些方面率先迈出步伐，将之作为自身成长为行业服务标杆的驱动力。

Today, manufacturers are demanding more and more services to their suppliers, not just spares and on-call technicians. Rising pressure to make their investment in equipment and systems to maximize, now, they hope that suppliers can provide the service agreement, deep testing services and machine upgrade, remote diagnosis and monitoring, training courses and the professional production process improvement Suggestions - the first step in these aspects, faith in the will serve as its own growth for the industry of the driving force of the benchmarking.



调试安装
Debugging installation



操作培训
Operation training



上门维修
Door to door service




保修维护
Warranty maintenance



延长维护
Extended maintenance

正信完善的服务为您提供了更多时间聚焦核心业务。通过技术服务，我们为您提供直达正信技术专家的快速、高效而可靠的通道。我们的服务技术人员时刻准备着为您服务。在各个生产环节的生产力。正信是您最可信赖的合作伙伴。

The perfect service provides you with more time to focus on the core business. Through technical services, we provide you with a fast, efficient and reliable channel for direct and trusted technical experts. Our service technicians are always ready to serve you. Productivity in each production segment. This is your most reliable partner.

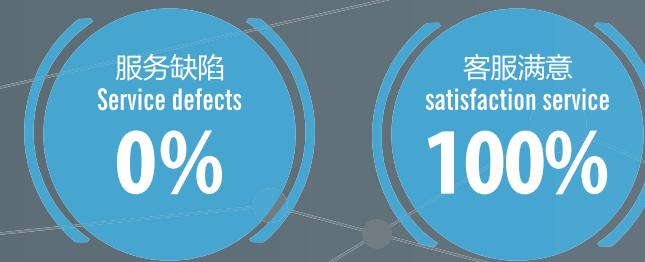

以布换塑 绿色降解

NON WOVEN FABRIC INSTEAD OF PLASTIC, GREEN DEGRADATION

根据政府新版禁塑政策，将在2020年底开始全面停止使用不可降解塑料袋

According to government new plasticban, China will stop to use nondegradable plastic bags from the end of 2020 year



美团外卖无纺布背心袋

Meituan-Dianping Takeout Non Woven T-shirt Bag



饿了么外卖无纺布背心袋

ELEME Takeout Non Woven T-shirt Bag



大润发超市无纺布背心袋

RT-MART Non Woven T-shirt Bag



永辉超市无纺布背心袋

Yonghui Supermarket Non Woven T-shirt Bag



家乐福超市无纺布背心袋

Carrefour Supermarket Non Woven T-shirt Bag



沃尔玛超市无纺布背心袋

Wal-Mart Supermarket Non Woven T-shirt Bag



联华超市无纺布背心袋

Lianhua Supermarket Non Woven T-shirt Bag

致力环保 绿色循环

COMMITTED TO ENVIRONMENTAL PROTECTION
GREEN CYCLE



王老吉无纺布立体袋
Wanglaoji Non-woven Box Bag



五粮液无纺布立体袋
Wuliangye Non-woven Box Bag



保温袋外卖袋
Insulation Bag Takeaway Bag



外卖无纺布立体袋
Takeaway Non-woven Box Bag



外卖无纺布立体袋
Takeaway Non-woven Box Bag



外卖无纺布立体袋
Takeaway Non-woven Box Bag



外卖无纺布立体袋
Takeaway Non-woven Box Bag

ZXL-A800

双道背心袋无纺布制袋机
Double Line Non Woven T-shirt Bag Making Machine


x2
PRODUCTION

13000
PER HOUR


该机为专业生产无纺布背心袋设计，应市场需求而设计，双道同时高速运行，增加背心袋产量
该机集机电为一体，运用LCD触摸屏操作。配以步进式定长，光电跟踪，电脑自动定位，电脑自动纠边，准确，平稳，自动计数，即可设定计数报警，自动打孔等工控装置，使其生产的成品封线牢固，切线美观。高速效，是你可以放心使用的优质环保型制袋设备。

1. This machine adopts Taiwan PLC touch screen,which can be edited.
2. Auto counting and stopping when setting numbers freely;
3. High voltage static processor and auto constant temperature heating controller;
4. Equipped with stepping motor(computer fixed length),manual unwinding magnetic powder tension controller and auto rectifying deviation,photoelectric tracking,printing color mark track orientation auto counting and alarming,auto punching etc.,which make it accurate and stable.
5. All aspect of the bags adopts thermal bonding by ultrasonic welding,such as bag edge folding,side sealing etc.which makes the machine fast and easy to operate, the products firm sealing,beautiful and decent.


专利产品
PATENTED
PRODUCT
ZL 2016 2 1174738.8

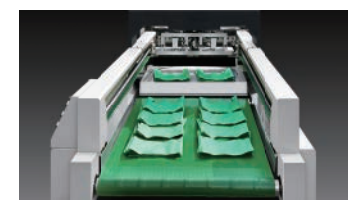

Double Line Auto Punching
双道自动冲孔

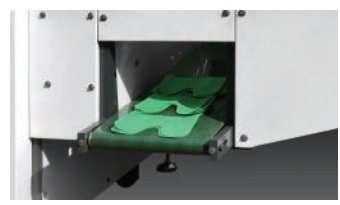

Double Synchronous Feeding
双道同步送料

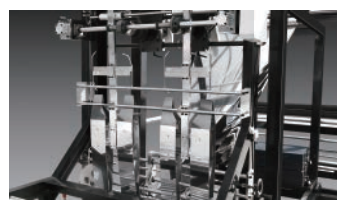

Double Ultrasonic Sealing
双道超声波封口



Double Auto Material Loading
双道自动上料

This machine adopts mechanical, electrical, optical and pneumatic integration technology, suitable for non woven fabric, different specs of vest bag can be made by this machine.



Main Technical Parameter

型号	Type	ZXL-A800
放料宽度	Unwinding Width	550~800mm(单道 Single Line)
生产速度	Production Speed	160~240pcs/min
制袋高度	Bag Height	100~800mm
制袋宽度	Bag Width	100~320mm
制袋克重	Material Basis Weight	30~100g/m ²
电源	Power	380V/220V
总功率	Total Power	18Kw
外形尺寸	Overall Dimension	10500×2200×2200mm
重量	Weight	3000Kg



设备品质性能不断提升，机器外观、技术参数及特点如有更改，恕不另行通知。
Equipment and improve the quality of the performance, the machine appearance, technical parameters and characteristics are subject to change without notice.



空前的生产规模
Unprecedented scale of production

ZXL-A700

多功能无纺布背心袋制袋机 Multi-function Non Woven T-shirt Bag Making Machine



该机适用原材料无纺布,能加工各种不同规格，不同形状的无纺布袋，平口袋、背心袋、穿绳袋等，该机集机电为一体，运用LCD触摸屏操作。配以步进式定长，光电跟踪，电脑自动定位，电脑自动纠边，准确，平稳，自动计数，即可设定计数报警，自动打孔等工控装置，使其生产的成品封线牢固，切线美观。高速效，是你可以放心使用的优质环保型制袋设备。

This machine is suitable for raw material non woven fabric, and it can be used to process all kinds of non woven bags with different specifications, different shapes, D-cut bag, vest bag, and Drawstring bag, etc. This machine is integrated with mechanical and electrical, and is operated with LCD touch screen. With step - by - step fixed length, photoelectric tracking, computer automatic positioning, computer automatic Rectification, accurate, stable, automatic counting, can set counting alarm, automatic drilling and other industrial control devices, so that the production of finished product seal line Solid and beautiful tangent. High efficiency, is the high quality environmental protection bag you can use safely.

专利产品 PATENTED PRODUCT
ZL 2016 2 1174738.8



1. This machine adopts Taiwan PLC touch screen,which can be edited.
2. Auto counting and stopping when setting numbers freely;
3. High voltage static processor and auto constant temperature heating controller;
4. Equipped with stepping motor(computer fixed length),manual unwinding magnetic powder tension controller and auto rectifying deviation,photoelectric tracking,printing color mark track orientation,auto counting and alarming,auto punching etc.,which make it accurate and stable.
5. All aspect of the bags adopts thermal bonding by ultrasonic welding,such as bag edge folding,side sealing etc.which makes the machine fast and easy to operate,the products firm sealing,beautiful and decent.

你所关注的，正是我们所专注的
What you concern is what we focus on



Main Technical Parameter

型号	Type	ZXL-A700	ZXL-A800
生产速度	Production Speed	20-120pcs/min	20-120pcs/min
制袋宽度	Bag width	200-600mm	200-700mm
制袋高度	Bag Height	100-800mm	100-800mm
制袋厚度	Material Basis Weight	30-120g/m ²	30-120g/m ²
电源	Power	380V/220V	380V/220V
总功率	Total Power	15KW	18KW
外形尺寸	Overall Dimension	11000×1900×2100mm	11200×2100×2300mm
重量	Weight	2800Kg	3300Kg



设备品质性能不断提升，机器外观、技术参数及特点如有更改，恕不另行通知。
Equipment and improve the quality of the performance, the machine appearance, technical parameters and characteristics are subject to change without notice.



卷筒料
Roller Material



对折
Folding



封边
Side Sealing



插边
Side Gusset



定位
Position



封边热合
Edge Sealing



切断
Cutting



自动冲孔
Auto Punching




成品
Finished Product

ZXL-B700

多功能无纺布平口袋制袋机
Multi-function Non Woven D-cut Bag Making Machine

专利产品 PATENTED PRODUCT
ZL 2016 2 1174738.8

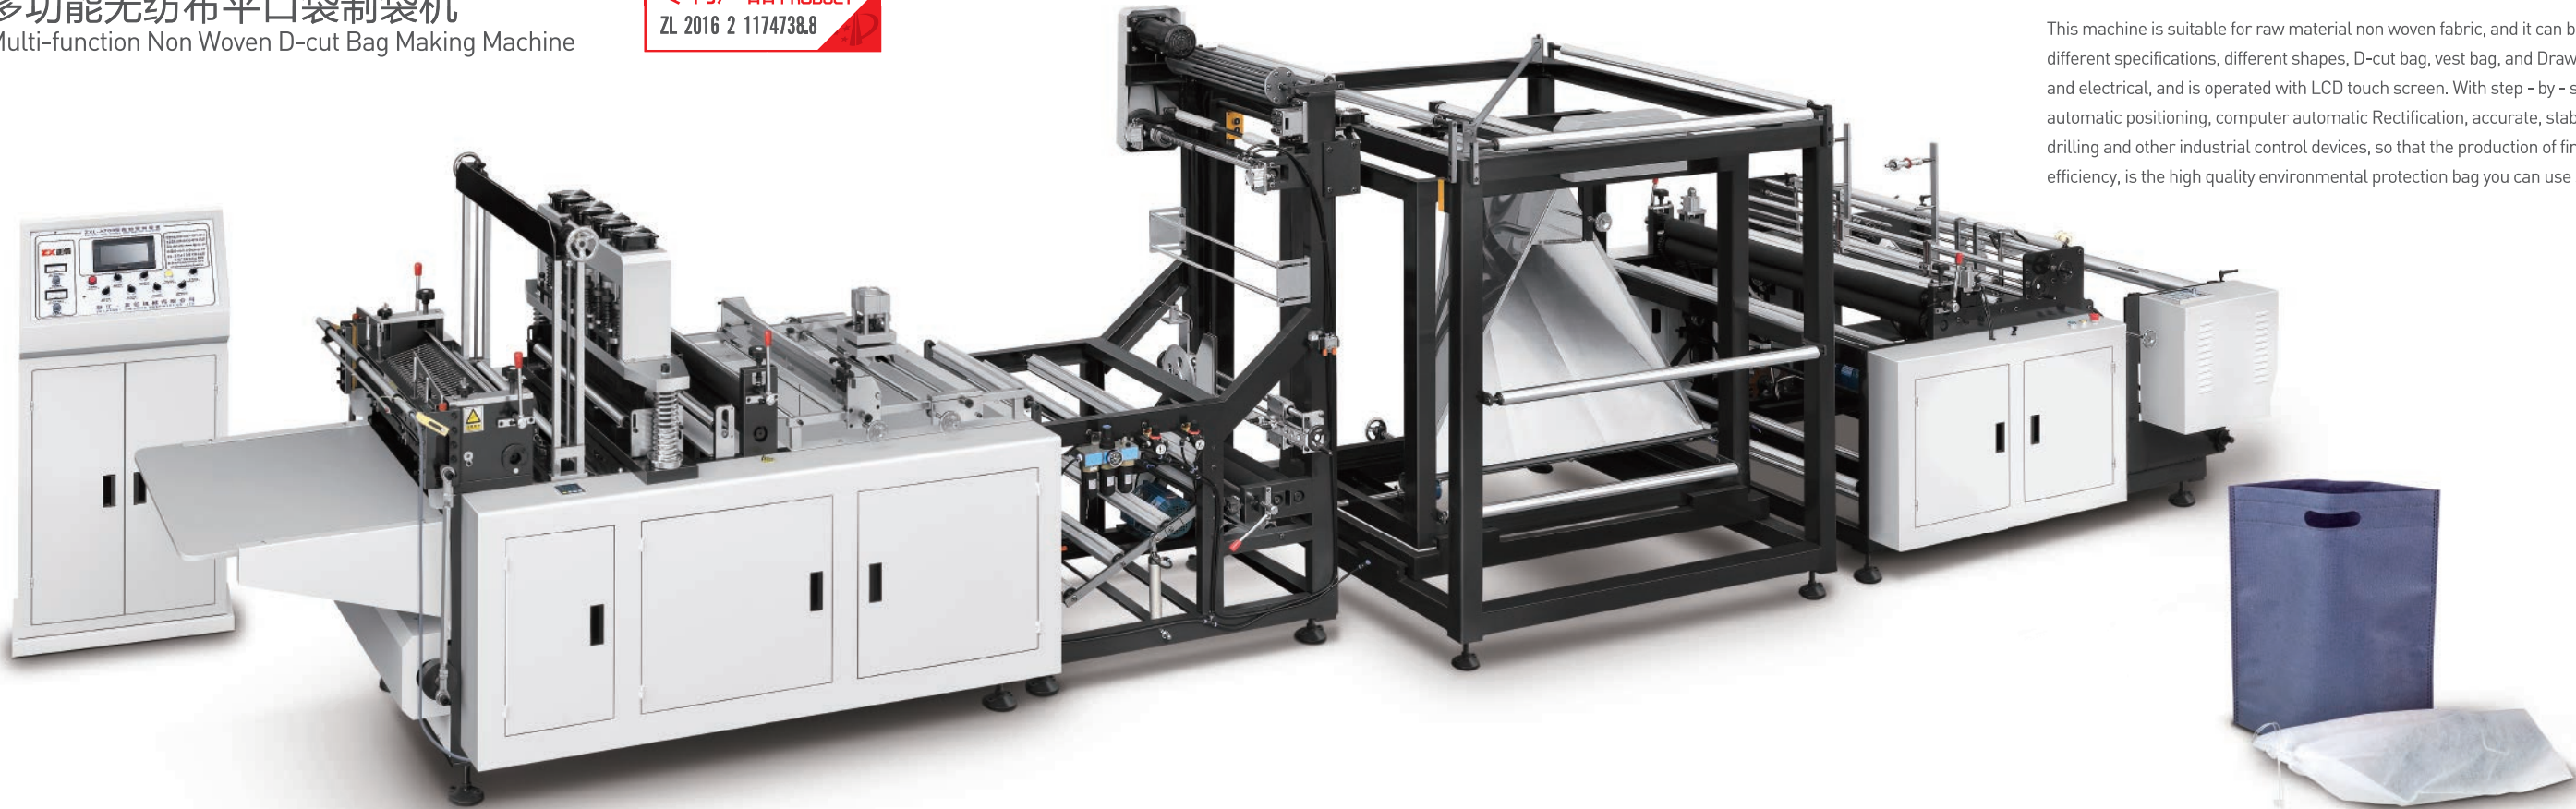

该机适用原材料无纺布,能加工各种不同规格,不同形状的无纺布袋,平口袋、背心袋、穿绳袋等,该机集机电为一体,运用LCD触摸屏操作。配以步进式定长,光电跟踪,电脑自动定位,电脑自动纠边,准确,平稳,自动计数,即可设定计数报警,自动打孔等工控装置,使其生产的成品封线牢固,切线美观。高速效,是你可以放心使用的优质环保型制袋设备。

This machine is suitable for raw material non woven fabric, and it can be used to process all kinds of non woven bags with different specifications, different shapes, D-cut bag, vest bag, and Drawstring bag, etc. This machine is integrated with mechanical and electrical, and is operated with LCD touch screen. With step - by - step fixed length, photoelectric tracking, computer automatic positioning, computer automatic Rectification, accurate, stable, automatic counting, can set counting alarm, automatic drilling and other industrial control devices, so that the production of finished product seal line Solid and beautiful tangent. High efficiency, is the high quality environmental protection bag you can use safely.

1. This machine adopts Taiwan PLC touch screen,which can be edited.
2. Auto counting and stopping when setting numbers freely;
3. High voltage static processor and auto constant temperature heating controller;
4. Equipped with stepping motor(computer fixed length),manual unwinding magnetic powder tension controller and auto rectifying deviation,photoelectric tracking,printing color mark track orientation,auto counting and alarming,auto punching etc.,which make it accurate and stable.
5. All aspect of the bags adopts thermal bonding by ultrasonic welding,such as bag edge folding,side sealing etc.which makes the machine fast and easy to operate,the products firm sealing,beautiful and decent.





Main Technical Parameter

型号	Type	ZXL-B700	ZXL-B800
生产速度	Production Speed	20-120pcs/min	20-120pcs/min
制袋宽度	Bag width	100-800mm	100-800mm
制袋高度	Bag Height	200-600mm	200-700mm
制袋厚度	Material Basis Weight	30-120g/m ²	30-120g/m ²
电源	Power	380V/220V	380V/220V
总功率	Total Power	12KW	15KW
外形尺寸	Overall Dimension	7600×1900×2100mm	7800×2100×2300mm
重量	Weight	2000Kg	2500Kg



设备品质性能不断提升, 机器外观、技术参数及特点如有更改, 恕不另行通知。
Equipment and improve the quality of the performance, the machine appearance, technical parameters and characteristics are subject to change without notice.

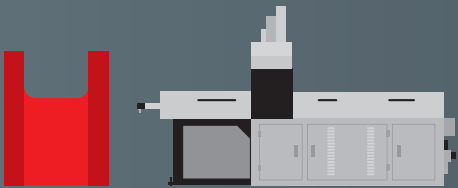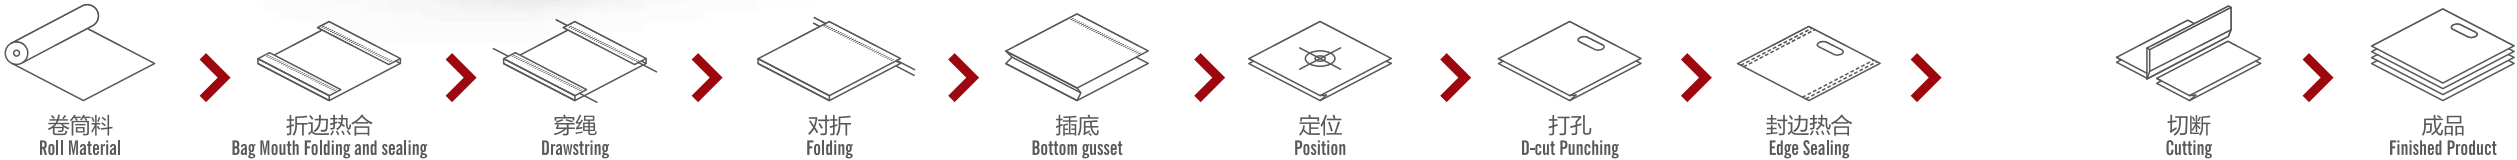

可选配背心袋自动冲孔机
The Optional Automatic
T-shirt Bag Punching Machine

ZXL-C700


多功能无纺布立体袋制袋机
Multi-function Non Woven Box Bag Making Machine



该机适用原材料无纺布,能加工各种不同规格,不同形状的无纺布袋,平口袋、背心袋、穿绳袋、立体袋等,该机集机电为一体,运用LCD触摸屏操作。配以步进式定长,光电跟踪,电脑自动定位,电脑自动纠边,准确,平稳,自动计数,即可设定计数报警,自动打孔等工控装置,使其生产的成品封线牢固,切线美观。高速效,是你可以放心使用的优质环保型制袋设备。


This machine is suitable for raw material non woven fabric, and it can be used to process all kinds of non woven bags with different specifications, different shapes, D-cut bag, vest bag, and Drawstring bag, etc. The machine is integrated with mechanical and electrical, and is operated with LCD touch screen. With step - by - step fixed length, photoelectric tracking, computer automatic positioning, computer automatic Rectification, accurate, stable, automatic counting, can set counting alarm, automatic drilling and other industrial control devices, so that the production of finished product seal line Solid and beautiful tangent. High efficiency, is the high quality environmental protection bag you can use safely.

1. This machine adopts Taiwan PLC touch screen,which can be edited.
2. Auto counting and stopping when setting numbers freely;
3. High voltage static processor and auto constant temperature heating controller;
4. Equipped with stepping motor(computer fixed length),manual unwinding magnetic powder tension controller and auto rectifying deviation,photoelectric tracking,printing color mark track orientation,auto counting and alarming,auto punching etc.,which make it accurate and stable.
5. All aspect of the bags adopts thermal bonding by ultrasonic welding,such as bag edge folding,side sealing etc.which makes the machine fast and easy to operate,the products firm sealing,beautiful and decent.

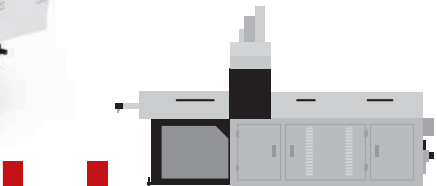

可选配背心袋自动冲孔机
The Optional Automatic
T-shirt Bag Punching Machine

创新与稳定的理想结合 Best combination of innovation and stability

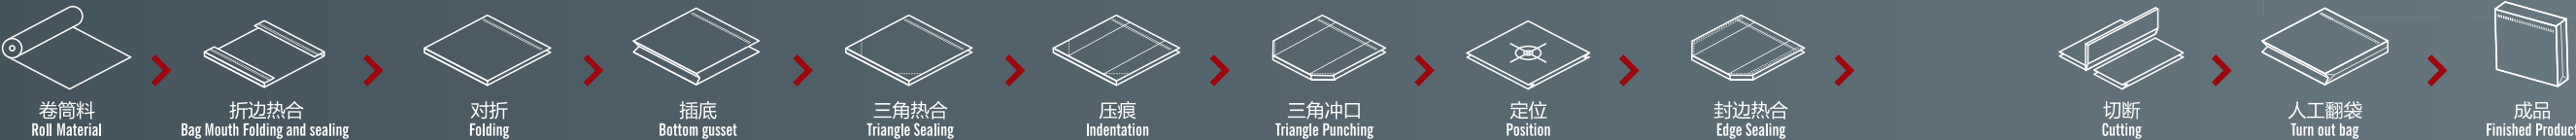

Main Technical Parameter

型号	Type	ZXL-C700	ZXL-C800
生产速度	Production Speed	20-120pcs/min	20-120pcs/min
制袋宽度	Bag width	100-800mm	100-800mm
制袋高度	Bag Height	200-600mm	200-700mm
制袋厚度	Material Basis Weight	30-120g/m ²	30-120g/m ²
电源	Power	380V/220V	380V/220V
总功率	Total Power	15KW	18KW
外形尺寸	Overall Dimension	9600×1900×2100mm	9800×2100×2300mm
重量	Weight	3000Kg	3500Kg



设备品质能不断提升, 机器外观、技术参数及特点如有更改, 恕不另行通知。
Equipment and improve the quality of the performance, the machine appearance, technical parameters and characteristics are subject to change without notice.

ZXL-C700


ZXL-D700

全自动平口烫把无纺布制袋机（四合一） Non Woven Flat Bag Making Machine with Online Handle Attaching(4-in-1)

专利产品 PATENTED PRODUCT
ZL 2016 2 1174738.8

此机为国内目前最先进的设备，此机在制袋的时候自动焊上手提把，烫把速度高达30-75个/分钟，相当于5台烫把机，5个工人的烫把速度，能生产手提袋，平口袋、背心袋、穿绳袋等，已广泛应用于服装、鞋类、酒类、礼品类等包装，大大减少人工，降低制造成本，代替了传统的手工缝纫袋，正热销于全国各地。

This machine adopts mechanical, electrical, optical and pneumatic integration technology, It's a advanced equipment and has the function of automatic handle loop bonding (speed up to 75pcs/min, equal to 5 worker's bonding speed or 5 handle; loop sealing machine), suitable for the printed non woven fabric, different specs of non woven handle bags flat bag, D-cut bag, bottom/side gusset bag, vest bags and drawstring bags etc. can be made by this machine. Which can replace the traditional handle-sealing, reduce labor and manufacturing cost, vast apply to the packing of costume, shoes, wine, gift etc.

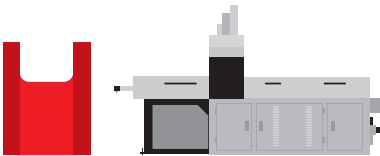

可选配背心袋自动冲孔机
The Optional Automatic
T-shirt Bag Punching Machine



1. This machine adopts top brand PLC touch screen,which can be edited.
2. Auto counting and stopping when setting numbers freely;
3. High voltage static processor and auto constant temperature heating controller;
4. Equipped with stepping motor(computer fixed length),manual unwinding magnetic powder tension controller photoelectric tracking,printing color mark track orientation,auto counting and alarming,auto punching and auto bonding handle etc., which make it accurate and stable.
5. All aspect of the bag adopts thermal bonding by ultrasonic welding,such as bag mouth folding,side sealing etc.which makes the machine fast and easy to operate,products firm sealing,beautiful and decent.



Main Technical Parameter


型号	Type	ZXL-D700	ZXL-D800
生产速度	Production Speed	20-120pcs/min	20-120pcs/min
制袋宽度	Bag width	100-800mm	100-800mm
制袋高度	Bag Height	200-600mm	200-700mm
手提把长度	Handle Loop Length	380-600mm	380-600mm
手提克重范围	Handle Material Basis Weight	60-100g/m ²	60-100g/m ²
制袋克重范围	Bag Material Basis Weight	35-100g/m ²	35-100g/m ²
电源	Power	380V/220V	380V/220V
总功率	Total Power	15KW	18KW
外形尺寸	Overall Dimension	9600×3000×2100mm	9800×3200×2300mm
重量	Weight	3200Kg	3500Kg




设备品质性能不断提升，机器外观、技术参数及特点如有更改，恕不另行通知。
Equipment and improve the quality of the performance, the machine appearance, technical parameters and characteristics are subject to change without notice.




卷筒料
Roll material



折边热合
Bag Mouth folding and sealing



对折
Folding



插底
Bottom gusset



烫手提把
Loop handle



打孔
D-cut punching



定位
Position



封边热合
Edge Sealing



切断
Cutting




成品
Finished Product

ZXL-E700

全自动立体烫把无纺布制袋机（五合一） Non Woven Box Bag Making Machine with Online Handle Attaching(5-in-1)

此机为国内目前最先进的设备，此机在制袋的时候自动焊上手提把，烫把速度高达30-75个/分钟，相当于5台烫把机，5个工人的烫把速度，能生产手提袋，平口袋、背心袋、穿绳袋等，已广泛应用于服装、鞋类、酒类、礼品类等包装，大大减少人工，降低制造成本，代替了传统的手工缝纫袋，正热销于全国各地。

This machine adopts mechanical, electrical, optical and pneumatic integration technology, It's a advanced equipment and has the function of automatic handle loop bonding (speed up to 75pcs/min, equal to 5 worker's bonding speed or 5 handle; loop sealing machine), suitable for the printed non woven fabric, different specs and shapes of non woven handle bags, box bag (need to turn out) flat bag, D-cut bag, bottom/side gusset bag, vest bag and drawstring bag etc. can be made by this machine. Which can replace the traditional handle-sealing, reduce labor and manufacturing cost, vast apply to the packing of costume, shoes, wine, gift etc.

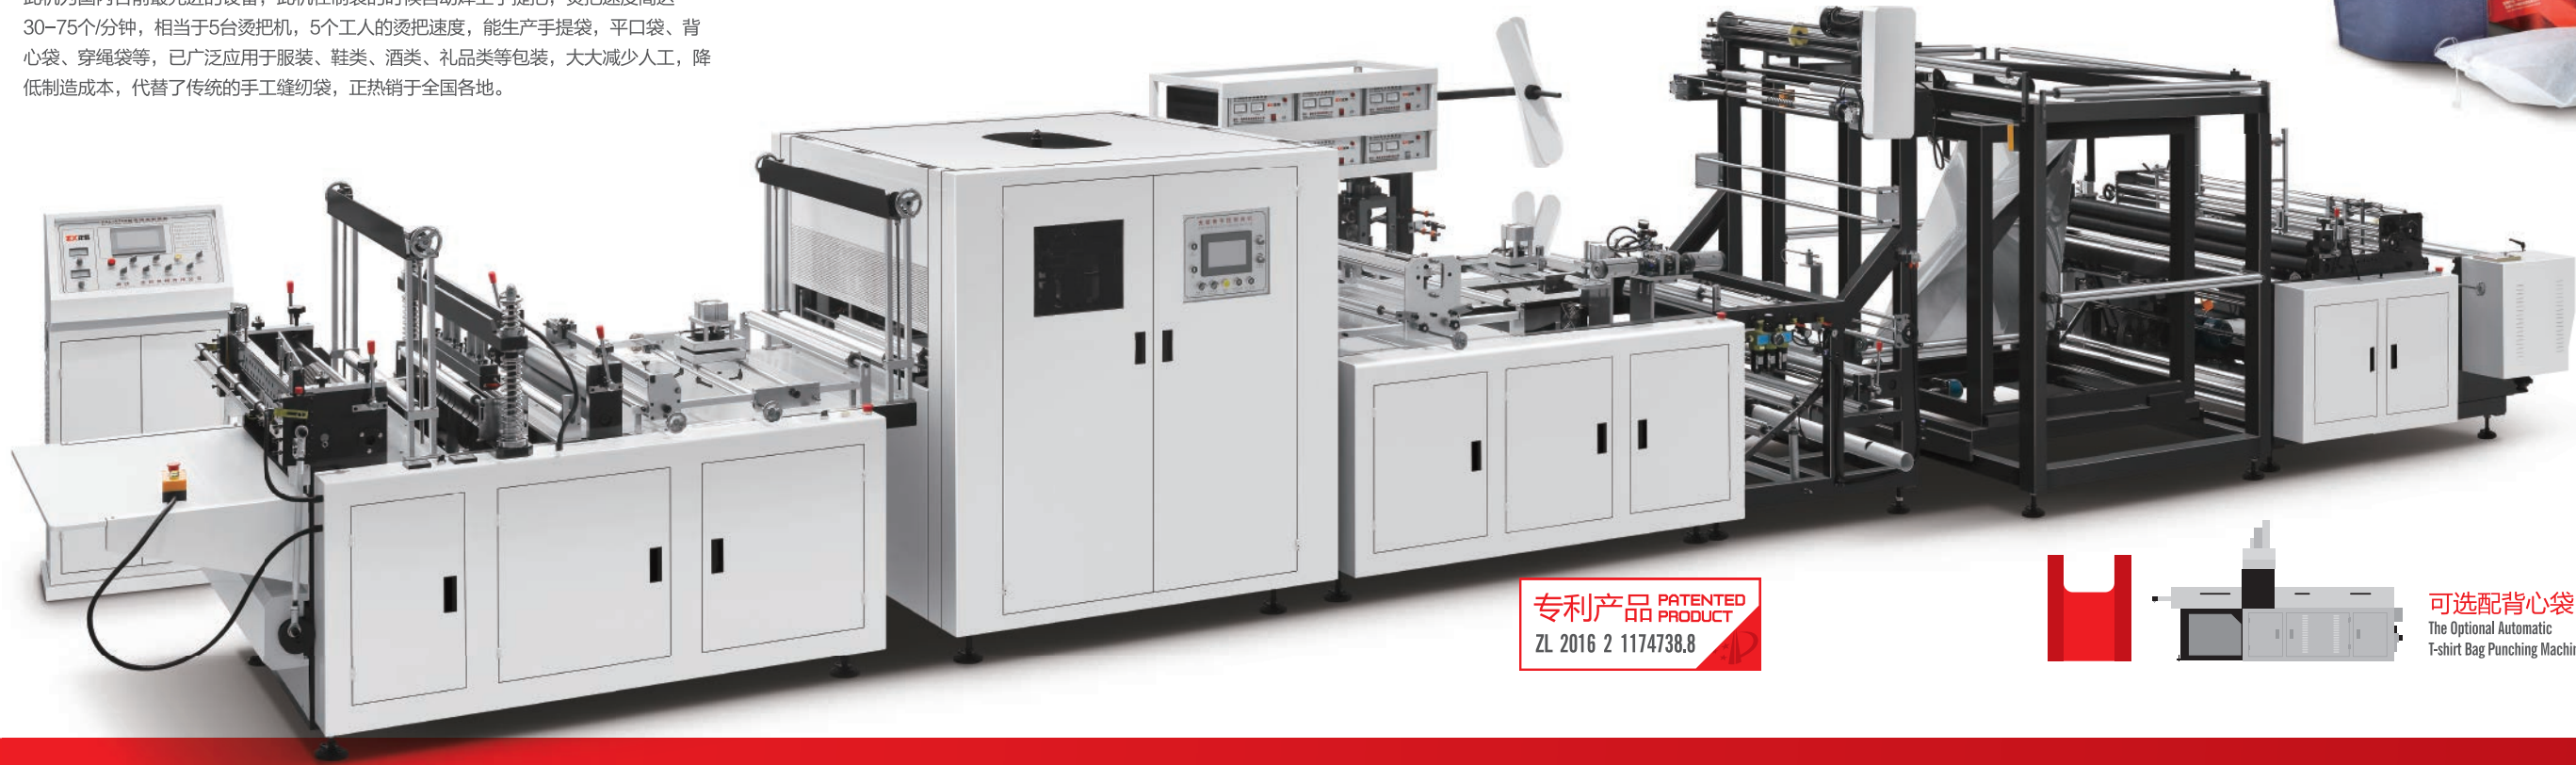

1. This machine adopts top brand PLC touch screen,which can be edited.
2. Auto counting and stopping when setting numbers freely;
3. High voltage static processor and auto constant temperature heating controller;
4. Equipped with stepping motor(computer fixed length),manual unwinding magnetic powder tension controller photoelectric tracking,printing color mark track orientation,auto counting and alarming,auto punching and auto bonding handle etc., which make it accurate and stable.
5. All aspect of the bag adopts thermal bonding by ultrasonic welding,such as bag mouth folding,side sealing etc.which makes the machine fast and easy to operate,products firm sealing,beautiful and decent.




Main Technical Parameter

型号	Type	ZXL-E700	ZXL-E800
生产速度	Production Speed	20-120pcs/min	20-120pcs/min
制袋宽度	Bag width	100-800mm	100-800mm
制袋高度	Bag Height	200-600mm	200-700mm
手提把长度	Handle Loop Length	380-600mm	380-600mm
手提克重范围	Handle Material Basis Weight	60-100g/m ²	60-100g/m ²
制袋克重范围	Bag Material Basis Weight	35-100g/m ²	35-100g/m ²
电源	Power	380V/220V	380V/220V
总功率	Total Power	18KW	20KW
外形尺寸	Overall Dimension	11500×3000×2100mm	12000×3200×2300mm
重量	Weight	4000Kg	4300Kg



设备品质性能不断提升，机器外观、技术参数及特点如有更改，恕不另行通知。
Equipment and improve the quality of the performance, the machine appearance, technical parameters and characteristics are subject to change without notice.



可选配背心袋自动冲孔机
The Optional Automatic
T-shirt Bag Punching Machine




卷筒料
Roll Material



折边热合
Bag mouth folding and sealing



对折
Folding




插底
Bottom gusset




三角热合
Triangle Sealing



压痕
Indentation




烫手提把
Loop handle



三角冲口
Triangle Punching




定位
Position



封边热合
Edge Sealing



切断
Cutting




人工翻袋
Turn out bag



成品
Finished Product

ZXL-B700

水果袋无纺布制袋机（定做）
Non Woven Fruit Bag Making Machine (custom-made)

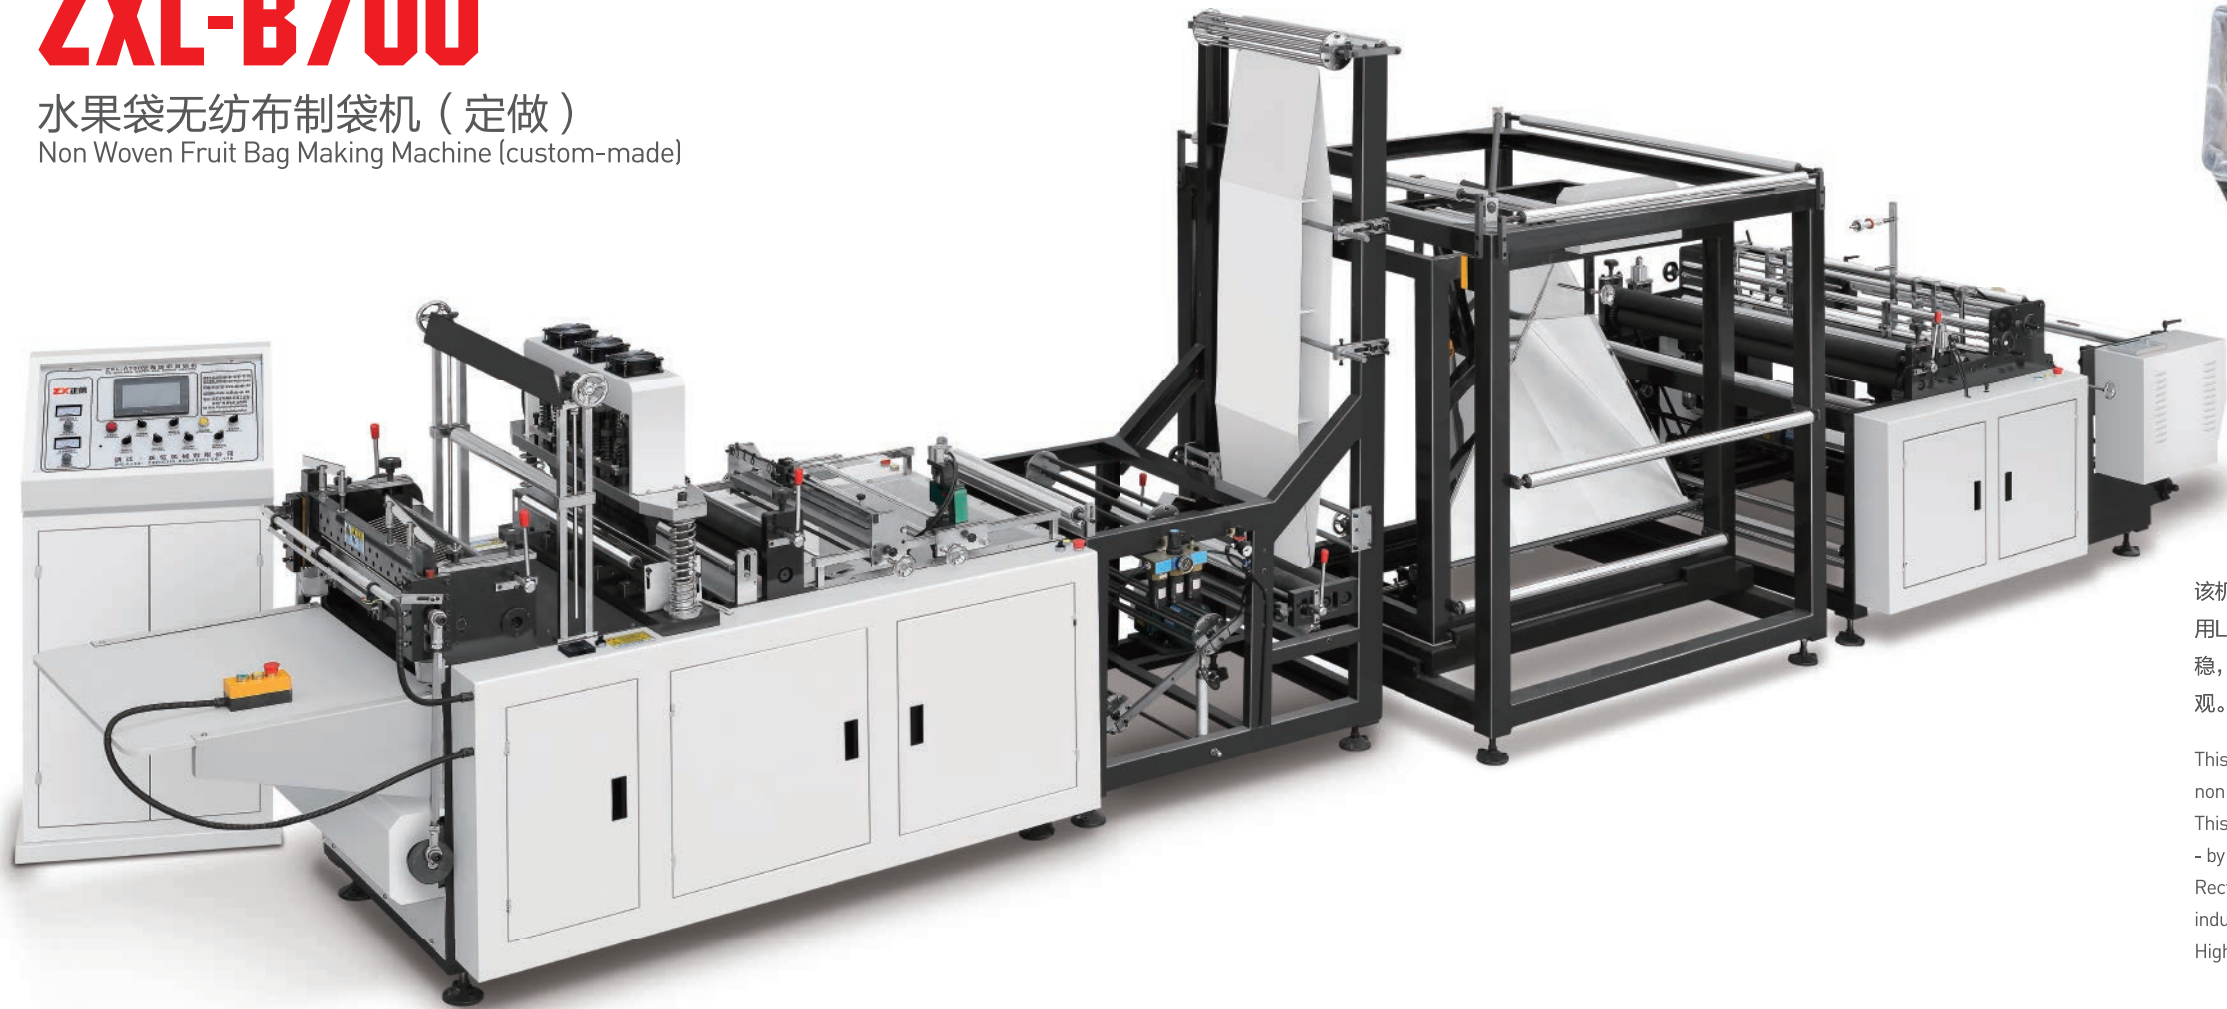

Main Technical Parameter

型号	Type	ZXL-B700	ZXL-B800
生产速度	Production Speed	20-120pcs/min	20-120pcs/min
制袋宽度	Bag width	100-1000mm	100-1000mm
制袋高度	Bag Height	200-600mm	200-700mm
制袋厚度	Material Basis Weight	20-100g/m ²	20-100g/m ²
电源	Power	380V/220V	380V/220V
总功率	Total Power	12KW	15KW
外形尺寸	Overall Dimension	7600×1900×2500mm	7800×2100×2600mm
重量	Weight	1500Kg	2000Kg



设备品质性能不断提升，机器外观、技术参数及特点如有更改，恕不另行通知。
Equipment and improve the quality of the performance, the machine appearance, technical parameters and characteristics are subject to change without notice.


该机适用原材料为无纺布,主要生产无纺布水果袋，平口袋、穿绳袋等，该机集机电为一体，运用LCD触摸屏操作，配以步进式定长，光电跟踪，电脑自动定位，电脑自动纠边，准确，平稳，自定计数，即可设定计数报警，自动打孔等工控装置，使其生产的成品封线牢固，切线美观。高速效，是你可以放心使用的优质环保型制袋设备。

This machine is suitable for raw material non woven fabric, and it can be used to process all kinds of non woven bags with different specifications, different shapes, Fruit bag, D-cut bag, and Drawstring bag, etc. This machine is integrated with mechanical and electrical, and is operated with LCD touch screen. With step - by - step fixed length, photoelectric tracking, computer automatic positioning, computer automatic Rectification, accurate, stable, automatic counting, can set counting alarm, automatic drilling and other industrial control devices, so that the production of finished product seal line Solid and beautiful tangent. High efficiency, is the high quality environmental protection bag you can use safely.


1. This machine adopts Taiwan PLC touch screen, which can be edited.
2. Auto counting and stopping when setting number freely;
3. High voltage static processor and auto constant temperature heating controller;
4. Equipped with stepping motor(computer fixed length),manual unwinding magnetic powder tension controller and auto rectifying deviation,photoelectric tracking,printing color mark track orientation,auto counting and alarming,auto punching etc., which make it accurate and stable.
5. All aspect of the bags adopts thermal bonding by ultrasonic welding,such as bag edge folding,side sealing etc.which makes the machine fast and easy to operate,the products firm sealing,beautiful and decent.



卷筒料
Roll Material




折边热合
Bag mouth folding and sealing



穿绳
Drawstring




对折
Folding




插底
Bottom gusset



定位
Position




打孔
Hole punching



封边热合
Edge sealing



切断
Cutting



成品
Finished Product

ZXL-H700

全自动无纺布拉链袋制袋机（自动上拉头）
Automatic Non Woven Fabric Zipper
Bag-Making Machine (Automatic Pull Head On)

- 1.该机采用的是先进的电脑控制系统，威伦液晶显示器，整机采用变频调速，采用高波段超声波热合原理焊接，超声波滚边焊接，超声波滚底焊接等工程装置，光电跟踪自动纠边，双料磁粉刹车，无料自动停机，自动计数报警。
- 2.本机设有自动上拉链头的装置，不同于传统的手工制作，拉链袋的生产及穿拉头的工作可在机上一次性完成。真正实现拉链袋生产的自动化。


- 1.Aircraft was using advanced computer control system, Weinview LCD, the machine adopts frequency control ,using high-band ultrasonic heat sealing principle welding,ultrasonic welding trim then,ultra-sonic welding light engineering equipment roll bottom, photoelectric tracking and automatic correction side,double magnetic brakes, no material automatic shutdown,automatic counting alarm.
- 2. Machine is equipped with automatic zipper means, unlike the traditional hand-made production and work wear slider zipper bags can finish on the machine.Real zipper bag production automation.



Main Technical Parameter			
型号	Type	ZXL-H700	ZXL-H800
生产速度	Production Speed	20-80pcs/min	20-80pcs/min
制袋宽度	Bag Width	50-1000mm	50-1000mm
制袋高度	Bag Height	30-700mm	30-800mm
厚度	Thickness material basic weight	30-100mm	30-100mm
上拉头速度	The speed of slide mounting	40-80pcs/min	40-80pcs/min
电源	Power	220V-380V	220V-380V
总功率	Total Power	15KW	18KW
外形尺寸	Overall Dimension	8500×1270×1800mm	8500×1370×1800mm



设备品质性能不断提升，机器外观、技术参数及特点如有更改，恕不另行通知。
Equipment and improve the quality of the performance, the machine appearance, technical parameters and characteristics are subject to change without notice.

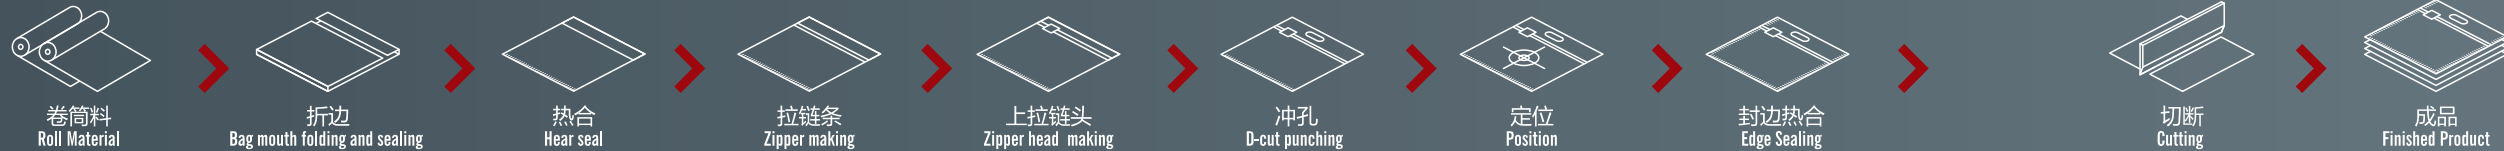



ZXQ-C1200

烫把一体无纺布横切机
Non Woven Cross Cutting Machine with Online Handle Attaching

本机为国内目前最先进的无纺布横切机，烫把速度最快可达到70个/分钟，专用于无纺布的裁切，裁片的同时自动焊上手提把，主要针对无纺布手工缝纫袋，酒袋、礼品袋等，大大的减少了劳动强度，提高工作效率，节省成本，是裁片烫把的最佳设备。

This machine is an advanced specialized non woven cross cutting equipment, has the function of auto bonding the handle loop while slicing (speed up to 70pcs/min). It's mainly used in the producing of manual non woven sealing bags, wine and gift bags etc., which is largely improved the production efficiency, reduce the labor intensity and cost.


Main Technical Parameter

型号	Type	ZXQ-C1200
制袋速度	Production Speed	30-70pcs/min
制袋宽度	Bag Width	500-1100mm
制袋高度	Bag Length	280-800mm
烫把厚度	Handle Material Thickness	60-100g/m ²
手提把长度	Handle Loop Length	380-600mm
制袋克重范围	Bag Material Basis Weight	35-120g/m ²
电源	Power	380V/220V
总功率	Total Power	13KW
外形尺寸	Overall Dimension	6500×2300×1800mm
机器重量	Weight	2600KG

设备品质性能不断提升，机器外观、技术参数及特点如有更改，恕不另行通知。
Equipment and improve the quality of the performance, the machine appearance, technical parameters and characteristics are subject to change without notice.

1. 本机采用电脑控制系统，步进电机控制裁切，光电跟踪，自动纠偏，无料报警、主机变频、张力控制、超声波焊接等。
2. 本机通过折边后，再经过左右两台烫把机把双手提条焊好，裁切出来。
3. 切刀部位，采用优质刀具裁切，耐磨，耐用，产品裁切整齐，平整。
4. 整机操作简单，直观容易操作，一个人可完成所有工序，用人少，节省人工。
5. 设备安装调试方便，快捷。
6. 该机裁片烫把速度在30-70左右每分钟。

- 1.This machine adopts computer control system,stepping motor cutting control system,photoelectric tracking,auto rectifying deviation,no material alarming,main motor frequency conversion speed control,tension control and ultrasonic welding etc.
2. After the month folding,welding the double handle loop on the material by two side handle bonding machine,and then cutting.
3. Adopts quality cutting knife,wear-resistant,durable,product cutting is tidy and beautiful.
4. Simple operation,only need one man to operate the machine.
5. Conveniently and quick installation.
6. Speed up to 70pcs/min.

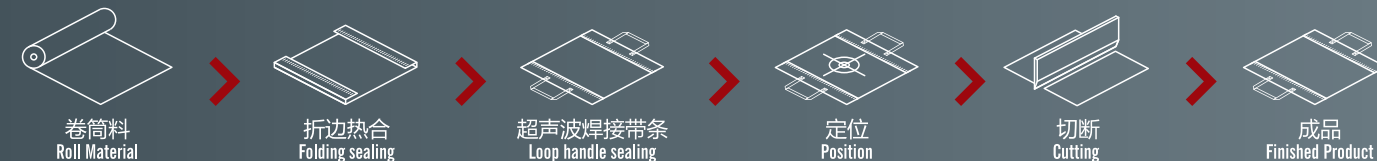

ZXH-A1200

单色丝网无纺布印刷机
Non Woven Single Color Screen Printing Machine



- 1. 自动送料、印刷。干燥、收料、节省了人工、克服了受天气条件约束；
- 2. 压力均衡，墨层浓厚，适合高档无纺布产品的印刷；
- 3. 可使用多种尺寸的印版网框；
- 4. 大幅面印刷尺寸可同时印刷多个图案，大大提高了工作效率；
- 5. 满版印刷前后的有效图纹间隙最小可达1cm，有效减少材料损耗；
- 6. 全机传动与套印系统，采用伺服马达控制，确保印刷精度；
- 7. 印刷位置精确、稳定、可与横切机、分切机及无纺布制袋机配套使用，大大提高生产效率；

- 1. Automatic feeding, printing, drying and coleting, saving labor and overcome the constraints of weather conditions.
- 2. Pressure equalization and thick ink layer, adapt to the printing of high-grade non woven products.
- 3. Various size of screen frame plate is available.
- 4. Multiple patterns can be printed simultaneously when do large format printing which is largely improved the work effency.
- 5. Minimum effective pattern printing gap low to 10mm before and after full-ptter printing, largely reduce the material consumption.
- 6. The driving of the whole machine and chromatography systems adopts servo motor control, ensure the printing precision.
- 7. Printing position is accurate and stable. It can be used together with transverse cutting, slittig and non woven bag making machine, which is largely improved production effency.



Main Technical Parameter


型号	Type	ZXH-A1200
卷材幅度	Material Unwinding Width	1200mm
最大放料直径	Max Diameter of Material Roll	1000mm
最大印刷尺寸	Max Printing Size	1150×1400mm
材料克重	Material Basis Weight	45-158g/m²
印刷速度	Printing Speed	500-1400m/Hour
总功率	Total Power	28kW/380V
外形尺寸	Overall Dimension	7500×1800×2200mm
机器重量	Weight	3000Kg



设备品质性能不断提升，机器外观、技术参数及特点如有更改，恕不另行通知。
Equipment and improve the quality of the performance, the machine appearance, technical parameters and characteristics are subject to change without notice.



晒版机
Printing Machine

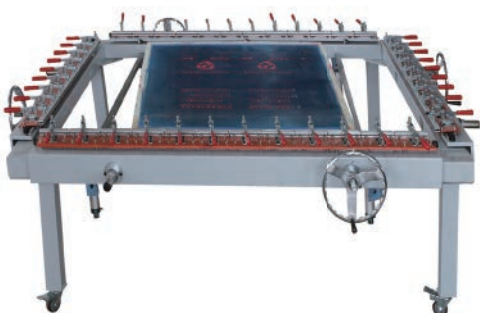

气动拉网机
Pneumatic Net Machine



千层架
Multi-layer Frame

ZXH-B1200

两色丝网无纺布印刷机
Non Woven Two Colors Screen Printing Machine



- 1. 自动送料、印刷。干燥、收料、节省了人工、克服了受天气条件约束；
- 2. 压力均衡，墨层浓厚，适合高档无纺布产品的印刷；
- 3. 可使用多种尺寸的印版网框；
- 4. 大幅面印刷尺寸可同时印刷多个图案，大大提高了工作效率；
- 5. 满版印刷前后的有效图纹间隙最小可达1cm，有效减少材料损耗；
- 6. 全机传动与套印系统，采用伺服马达控制，确保印刷精度；
- 7. 印刷位置精确、稳定、可与横切机、分切机及无纺布制袋机配套使用，大大提高生产效率；

- 1. Automatic feeding, printing, drying and collecting, saving labor and overcome the constraints of weather conditions.
- 2. Pressure equalization and thick ink layer, adapt to the printing of high-grade non woven products.
- 3. Various size of screen frame plate is available.
- 4. Multiple patterns can be printed simultaneously when do large format printing which is largely improved the work efficiency.
- 5. Minimum effective pattern printing gap low to 10mm before and after full-pattern printing, largely reduce the material consumption.
- 6. The driving of the whole machine and chromatography systems adopts servo motor control, ensure the printing precision.
- 7. Printing position is accurate and stable. It can be used together with transverse cutting, slitting and non woven bag making machine, which is largely improved the production efency.



Main Technical Parameter

型号	Type	ZXH-B1200
卷材幅度	Material Unwinding Width	1200mm
最大放料直径	Max Diameter of Material Roll	1000mm
最大印刷尺寸	Max Printing Size	1200×1150mm
材料克重	Material Basis Weight	60-120g/m²
印刷速度	Printing Speed	500-800m/Hour
总功率	Total Power	35KW/380V
外形尺寸	Overall Dimension	16000×1900×1600mm
机器重量	Weight	6000Kg




设备品质性能不断提升，机器外观、技术参数及特点如有更改，恕不另行通知。
Equipment and improve the quality of the performance, the machine appearance, technical parameters and characteristics are subject to change without notice.



收料自动纠偏
Rewinding Auto Rectifying Deviation



隐藏式配电箱
Hidden Distribution Box

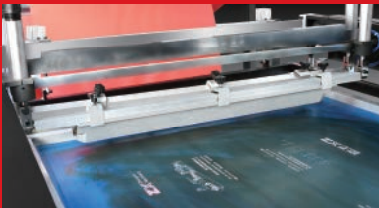

丝网版
Screen Printing Machine Plate




放料自动纠偏
Unwinding Auto Rectifying Deviation

ZXQ-B1200 单片料无纺布横切机

Roll to Sheets Non Woven Cross Cutting Machine

本机专业适用于无纺布，薄膜，纸类材料的裁切，是手工无纺布立体购物袋单张切片辅助最佳设备。

This machine adopts mechanical, electrical, optical and pneumatic integration technology, suitable for the cross cutting of non woven fabric, film and paper. It's the best single slice assisted equipment for producing the manual three-dimensional non woven shopping bags.

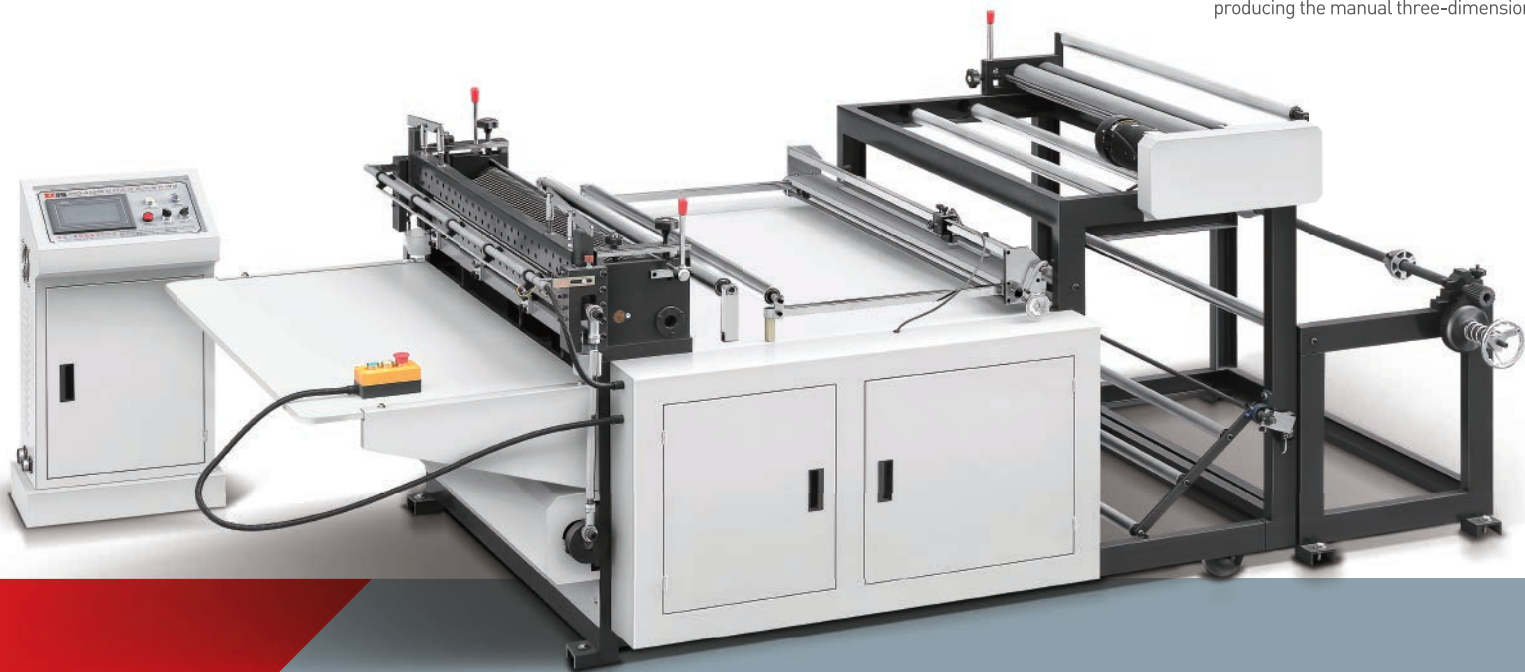


1. 本机采用步进电机控制定长裁切，设有光电跟踪修正系统。
2. 本机集光、电一体、操作简便，裁切精度高，机械稳定，噪音低等优点，是无纺布裁切的理想设备。
3. 电机变频调速，自动计数，报警停车等功能。
4. 采用重型优质刀具裁切，产品整齐，无棱角。

1. This machine equipped with photoelectric tracking fixed system and stepping motor for control the intercept of fixed length.
2. This machine adopts electrical, optical and pneumatic integration technology,which simplified the machine's operation improve the machine's cutting precision, mechanical stability and noise level.
3. This machine equipped with PLC touch screen,motor frequency conversion speed control,roll material feeding system manual unwinding magnetic power tension control and auto rectifying deviation,has the function of auto counting,alarming when stop etc.
4. Adopts heavy quality knife for cutting , the product is tidy and no sharp edges.

ZXQ-A1200 超声波无纺布横切机

Non Woven Cross Cutting Machine with Ultrasonic Welding

This machine adopts mechanical, electrical, optical and pneumatic integration technology, suitable for non woven fabric transverse cutting, folding and emboss forming at the same time, also can be used for adhesive sticker, paper, film, PVC, aluminum for and all those kind of roll material horizontal slicing, which is widely used in non woven bag industry.

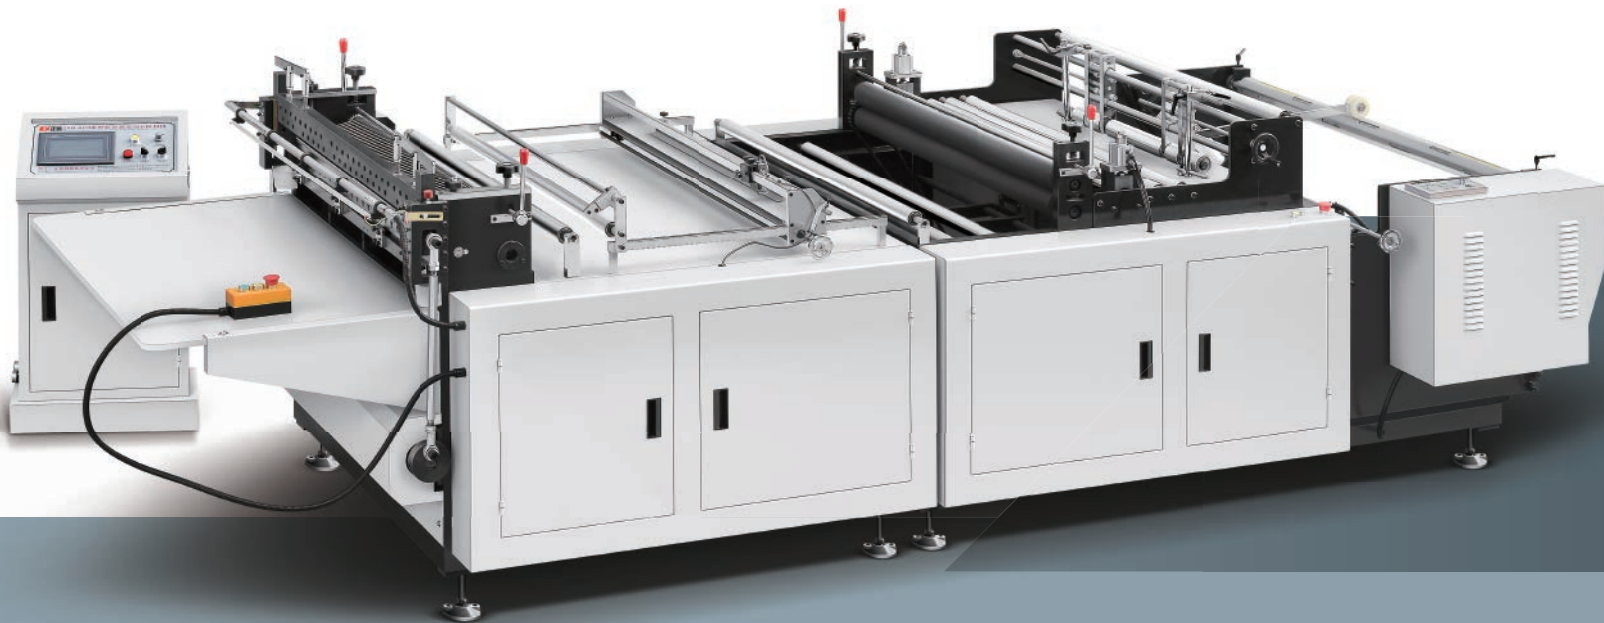

1. 本机采用步进电机控制定长裁切，设有光电跟踪修正系统。
2. 放料系统采用自动光电纠偏装置，本机配有折边，超声波烫合。切片功能，集光、电为一体，具有操作简便，裁切精度高，机械稳定，噪音低等优点，是无纺布裁切的理想设备。
3. 具有电机变频调速，自动计数，报警停车，张力控制等功能。
4. 采用重型优质刀具裁切，产品整齐，无棱角。

1. This machine equipped with photoelectric tracking fixed system and stepping motor for control the intercept of fixed length.
2. This machine adopts electrical, optical and pneumatic integration technology,which simplified the machine's operation improve the machine's cutting precision, mechanical stability and noise level.
3. This machine equipped with ultrasonic thermal bonding device,roll material feeding system manual unwinding magnetic powder tension control device,photoelectric rectifying deviation device and motor frequency conversion speed control device,has the function of edge folding and emboss forming,auto counting,alarming when stop etc.
4. Adopts heavy quality knife for cutting , the product is tidy and no sharp edges.

Main Technical Parameter				
型号	Type	ZXQ-B600	ZXQ-B1200	ZXQ-B1500
生产速度	Production Speed	20-140pcs/min	20-140pcs/min	20-140pcs/min
裁切宽度	Cutting width	50-560mm	50-1160mm	50-1460mm
裁切长度	Cutting Length	50-800mm	50-800mm	50-800mm
厚度	Material Basis Weight	20-150g	20-150g	30-100g
电压	Power	220V	220V	380V220V
总功率	Total Power	3KW	4KW	6KW
外形尺寸	Overall Dimension	3000×1300×1500mm	3200×1700×1500mm	3500×2100×1500mm
重量	Weight	800kg	1000kg	1500kg

Main Technical Parameter				
型号	Type	ZXQ-A600	ZXQ-A1200	ZXQ-A1500
生产速度	Production Speed	20-140pcs/min	20-140pcs/min	20-140pcs/min
裁切宽度	Cutting width	300-560mm	300-1160mm	500-1460mm
裁切长度	Cutting Length	50-800mm	50-800mm	50-800mm
厚度	Material Basis Weight	30-100g	30-100g	30-100g
电压	Power	380V220V	380V220V	380V220V
总功率	Total Power	5KW	6KW	7KW
外形尺寸	Overall Dimension	4300×1300×1500mm	4300×1900×1500mm	4300m×2300m×1500m
重量	Weight	1000kg	1200kg	2000kg

ZXC-A1700 无纺布分切机
Non Woven Slitting Machine



此无纺布分切机适用于分切各类塑料薄膜、玻璃纸、无纺布、铝箔、纸张等。微电脑控制，采用机械电子一体化、自动纠偏、自动计数、达到预设米数自动停机、张力控制器和步少调速器，并且有高速度，整齐分切材料等优点。

This machine adopts mechanical, electrical, optical and pneumatic integration technology, suitable for slitting various plastic film, glassine, aluminum foil, paper and non woven fabric etc. This machine equipped with computer control device, auto rectifying deviation. constant tension controller and speed regulator of stepping motor, has the function of auto counting, auto stop when reach to the preset meter, features high speed, slitting materials neatly etc. Material unwinding adopts auto rectifying deviation, manual magnetic powder tension controller and flatulence axis. Material rewinding adopts manual magnetic powder tension controller and flatulence axis.



Main Technical Parameter

型号	Type	ZXC-A1700
放料宽度	Unwinding Width	1700mm
最大放料直径	Max Diameter of Unwinding	1000mm
最大收料直径	Max Diameter of Rewinding	700mm
分切宽度	Slitting Width	20-1700mm
速度	Production Speed	20-100m/min
总功率	Total Power	2.2KW
电压	Power	380V
机器重量	Weight	1000kg
机器尺寸	Overall Dimension	2660×1920×1300mm

ZXU-A700 单片料无纺布烫把机
Semi Auto Monolithic Non Woven Handle Sealing Machine



自动手提袋烫合机是本公司汇集众多客户使用反馈后而改进的新型一次成型手提烫把机，该机是我公司研发的国内第一台采用独特结构，舍弃了旋转汽缸，送料采用步进电机(选配)，精密传送，结合人机界面齐全设定各项参数，更直观简便。特别增加整形装置，主要适用于无纺布手提袋的烫合。

This new type automatic primary shaping handle ironing machine is developed and improved based on many customer's feedback. We abandoned rotary cylinder and adopts unique structure, feeding material by stepping motor (optional), precision transmission, combined with man-machine interface for parameters setting, which make the machine more intuitive and convenient. Add special shaping device, mainly used in the handle ironing of non woven bags.



Main Technical Parameter

型号	Type	ZXU-A700
手提把长度	Handle Loop Length	380-600mm
材料克度	Bag Material Basis Weight	40-100g/m ²
生产速度	Production Speed	5-20pcs/min
电源	Power	220V50HZ
总功率	Total Power	5KW
外形尺寸	Overall Dimension	1300×800×1500mm
机器重量	Weight	450kg

ZXH-C21200 双色凸版无纺布印刷机

Two Color Non Woven Flexo Printing Machine

2

Color

PRINTING MACHINE



本机采用橡胶版或（感光树脂版）作为板材的印刷机，专业的印刷无纺布类材料，是无纺布印刷的理想设备。

The machine is a Two-color flexography printer, adopts rubber plate (or photosensitive resin plate) as printing plate, specialized in the printing of non woven fabric, it's an ideal equipment for non woven printing.


1. 操作简便，起动柔和，套色准确。
2. 计米器可根据要求设定印刷数量，到数自动停机。
3. 网纹滚筒传墨，墨色均匀。
4. 可靠的干燥系统，停机自动断路。
5. 360度连续可调纵向对花装置。
6. 变频调速，适应不同印刷速度。

1. Simple operation, flexible starting and accurate chromatograph.
2. Meter-counter could freely setting the printing quantity according to the requirement, auto stopping when finish or material break.
3. Adopts netting ink transfer roller, uniform process.
4. Equipped with reliable drying system, high speed rotation,auto cutout when stop.
5. 360 degree Continuous adjustable longitudinal device .
6. Different printing speed can be met by frequency conversion speed control.



水性油墨

WATER BASED INK



树脂版

RESIN PLATE



版辊

PRINTING ROLLER




Main Technical Parameter

型号	Type	ZXH-C21200	ZXH-C21400	ZXH-C21600
最大放料宽度	Max Material Unwinding Width	1200mm	1400mm	1600mm
卷材最大直径	Max Diameter of Material Roll	1000mm	1000mm	1000mm
最大印刷宽度	Max Printing Weight	1160mm	1360mm	1560mm
印刷长度	Printing Length	220-1000mm	220-1000mm	220-1000mm
版材厚度	Plate thickness	2.38/3.94mm	2.38/3.94mm	2.38/3.94mm
印刷速度	Printing Speed	10-60m/min	10-60m/min	10-60m/min
总功率	Total Power	8KW/380V	10KW/380V	12KW/380V
外形尺寸	Overall Dimension	3200×2300×2200mm	3200×2500×2200mm	3200×2800×2200mm
机器重量	Weight	1500Kg	1800Kg	2500Kg

ZXH-C41200 四色凸版无纺布印刷机

Four Color Non Woven Flexo Printing Machine

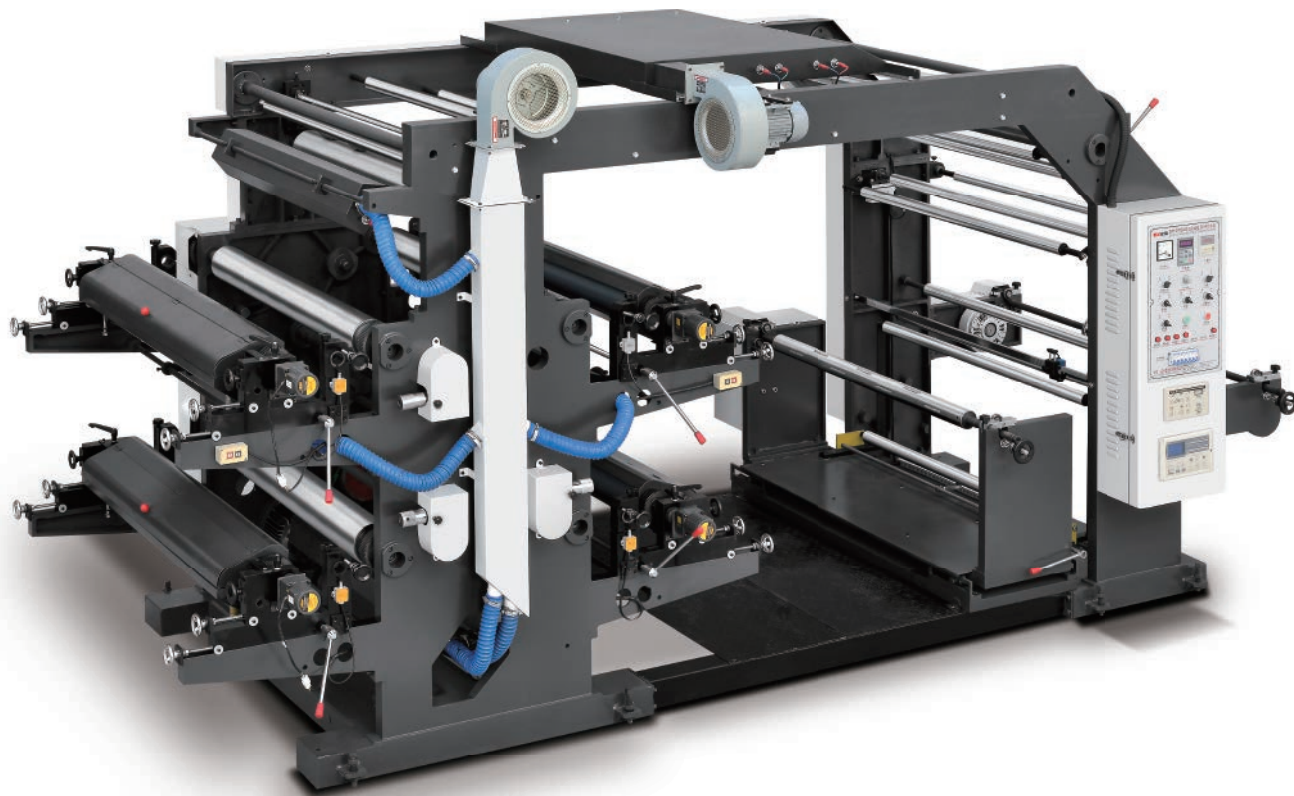

本机采用橡胶版或（感光树脂版）作为板材的印刷机，专业的印刷无纺布类材料，是无纺布印刷的理想设备。

This machine is a four-color flexography printer, adopts rubber plate (or photosensitive resin plate) as printing plate, specialized in the printing of non woven fabric, it's an ideal equipment for non woven printing.

1. 操作简便，起动柔和，套色准确。
2. 计米器可根据要求设定印刷数量，到数自动停机，断料自动停机。
3. 网纹滚筒传墨，墨色均匀。
4. 可靠的干燥系统，停机自动断路。
5. 360度连续可调纵向对花装置。
6. 变频调速，适应不同印刷速度。

1. Simple operation, flexible starting and accurate chromatograph.
2. Meter-counter could freely setting the printing quantity according to the requirement, auto stopping when finish or material break.
3. Adopts netting ink transfer roller, uniform process.
4. Equipped with reliable drying system, high speed rotation,auto cutout when stop.
5. 360 degree Continuous adjustable longitudinal device .
6. Different printing speed can be met by frequency conversion speed control.

4

Color

PRINTING MACHINE



Main Technical Parameter

型号	Type	ZXH-C4800	ZXH-C41000	ZXH-C41200
最大放料宽度	Max Material Unwinding Width	800mm	1000mm	1200mm
卷材最大直径	Max Diameter of Material Roll	1000mm	1000mm	1000mm
最大印刷宽度	Max Printing Weight	760mm	960mm	1160mm
印刷长度	Printing Length	190-1000mm	190-1000mm	190-1000mm
版材厚度	Plate thickness	2.38/3.94mm	2.38/3.94mm	2.28/3.94mm
印刷速度	Printing Speed	10-60m/min	10-60m/min	10-60m/min
总功率	Total Power	10KW/380V	13KW/380V	18KW/380V
外形尺寸	Overall Dimension	4800×1800×2400mm	4800×2000×2400mm	4800×2300×2400mm
机器重量	Weight	2000Kg	2200Kg	2800Kg

ZXH-C61200

六色凸版无纺布印刷机 Six Color Non Woven Flexo Printing Machine


1. 操作简便，起动柔和，套色准确。
2. 计米器可根据要求设定印刷数量，到数自动停机。
3. 网纹滚筒传墨，墨色均匀。
4. 可靠的干燥系统，停机自动断路。
5. 360度连续可调纵向对花装置。
6. 变频调速，适应不同印刷速度。

1. Simple operation, flexible starting and accurate chromatograph.
2. Meter-counter could freely setting the printing quantity according to the requirement, auto stopping when finish or material break.
3. Adopts netting ink transfer roller, uniform process.
4. Equipped with reliable drying system, high speed rotation,auto cutout when stop.
5. 360 degree Continuous adjustable longitudinal device .
6. Different printing speed can be met by frequency conversion speed control.



Main Technical Parameter

型号	Type	ZXH-C61200	ZXH-C61400	ZXH-C61600
最大放料宽度	Max Material Unwinding Width	1200mm	1400mm	1600mm
卷材最大直径	Max Diameter of the Material Roll	1000mm	1000mm	1000mm
最大印刷宽度	Max Printing Weight	1160mm	1360mm	1560mm
印刷长度	Printing Length	190-1000mm	190-1000mm	190-1000mm
版材厚度	Plate thickness	2.28/3.94mm	2.38/3.94mm	2.38/3.94mm
印刷速度	Printing Speed	10-60m/min	10-60m/min	10-60m/min
总功率	Total Power	22KW/380V	24KW/380V	26KW/380V
外形尺寸	Overall Dimension	5000×2300×2700mm	5000×2500×2700mm	5000×2800×2700mm
机器重量	Weight	4000Kg	4500Kg	5500Kg

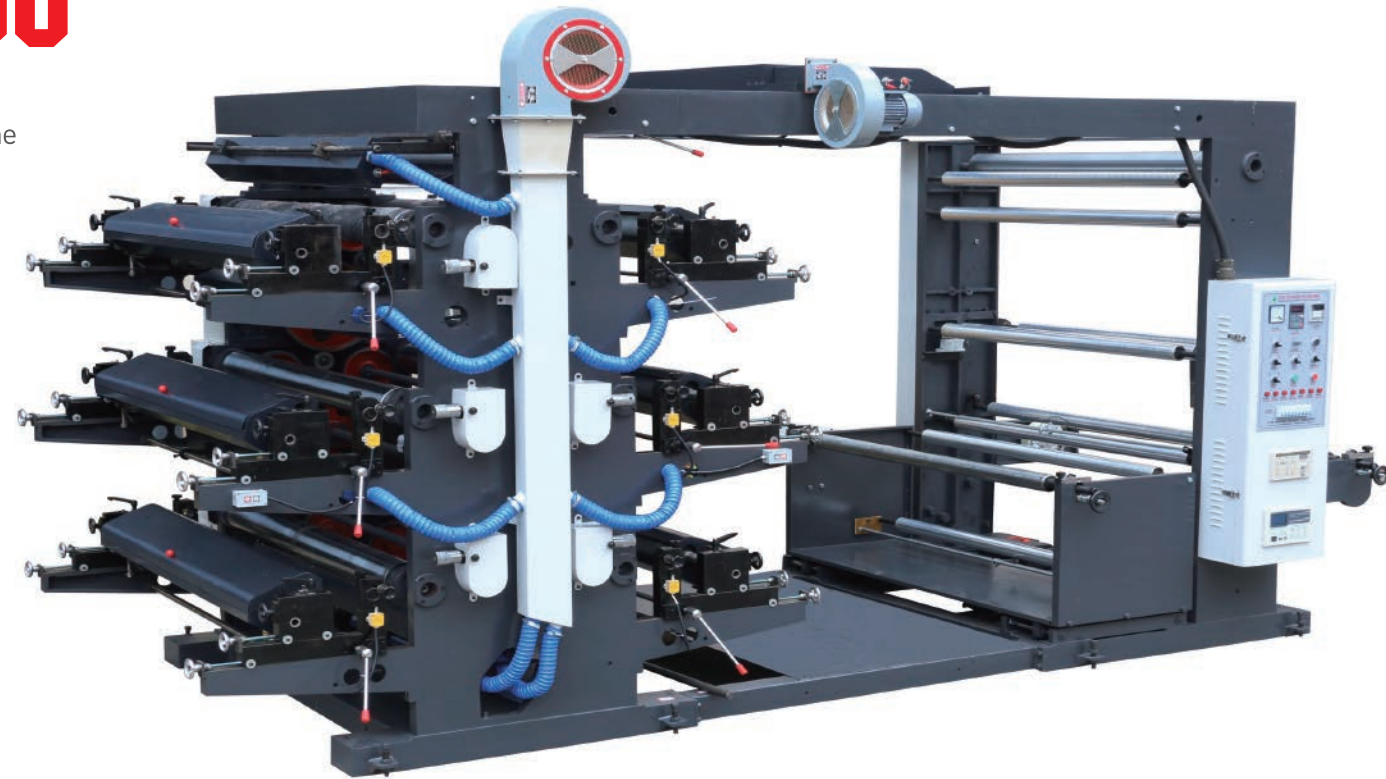

水性油墨
WATER BASED INK



树脂版
RESIN PLATE



版辊
PRINTING ROLLER

本机采用橡胶版或（感光树脂版）作为板材的印刷机，专业的印刷无纺布类材料，是无纺布印刷的理想设备。

This machine is a six-color flexography printer, adopts rubber plate [or photosensitive resin plate] as printing plate, specialized in the printing of non woven fabric, it's an idea equipment for non woven printing.

DS-850 手动印刷机 Bag To Bag Printing Machine

1. Meter counter equipped with pre-alarming bell.
2. 1500-3500 p/h, stepless governor.
3. Imported PVC Transmission belt, automatic positioning.
4. Printing roller can be automatically tracing and separating.
5. Oil leaking device can be replaced freely, oil-ink roller and offset can be separated and harmonized.
6. Transferring oil-ink by anilox roller, enhancing polished light for printing, saving oil-ink.
7. Rear transmission can be delayed with the function of airing.

- 1、计数器可预制报铃。
- 2、每小时从1500—3500条，无极变速。
- 3、进口PVC输送带，自动定位。
- 4、印刷辊自动跟踪分离。
- 5、油斗可随意交换，传墨棍与印版可离合。
- 6、网棍传墨，增加印刷光洁度，节省油墨。
- 7、后输送延长，晾干功能。



Main Technical Parameter

型号	Type	DS-850
电机功率	Motor Power	1.5KW(AC)
制版厚度	Plate Making Thickness	4-5mm
印刷速度	Printing Speed	1500-3500Pcs/H
最大印面	Max. Printing Area	1200×640mm
最大进料	Max. Material Feeding	1200×750mm
电压	Power	380V



ZX-600 晒版机 Printer




Main Technical Parameter

型号	Type	ZX-600	ZX-800	ZX-1200
晒版面积	Printer area	600×400mm	800×600mm	1200×600mm
机型尺寸	Measurement	860×710×1050mm	1090×910×1150mm	1490×910×1190mm
功率	Power	2.3KW	3.5KW	3.9KW
电压	Power Supply	220V	220V	220V



废料收卷机 Wastage Rewinding Equipment

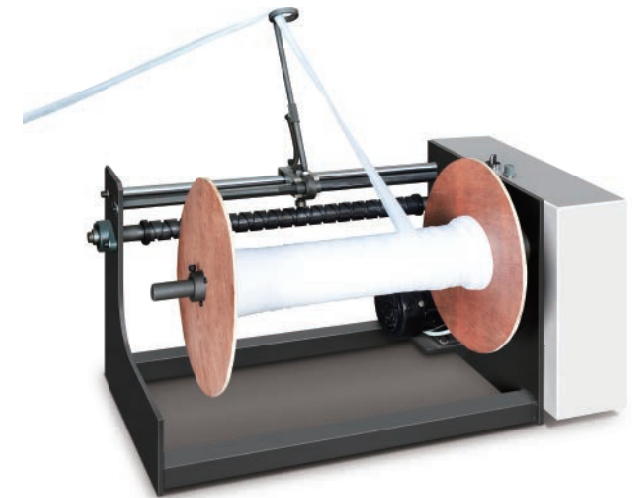


简易切管机 Simple Pipe Cutting Machine



ZXL-350

无纺布制袋机(中药袋、茶叶袋、育苗袋)
Non Woven Bag Making Machine
(ATraditional Chinese Medicine Bag, Tea Bag, Seedling Bag)

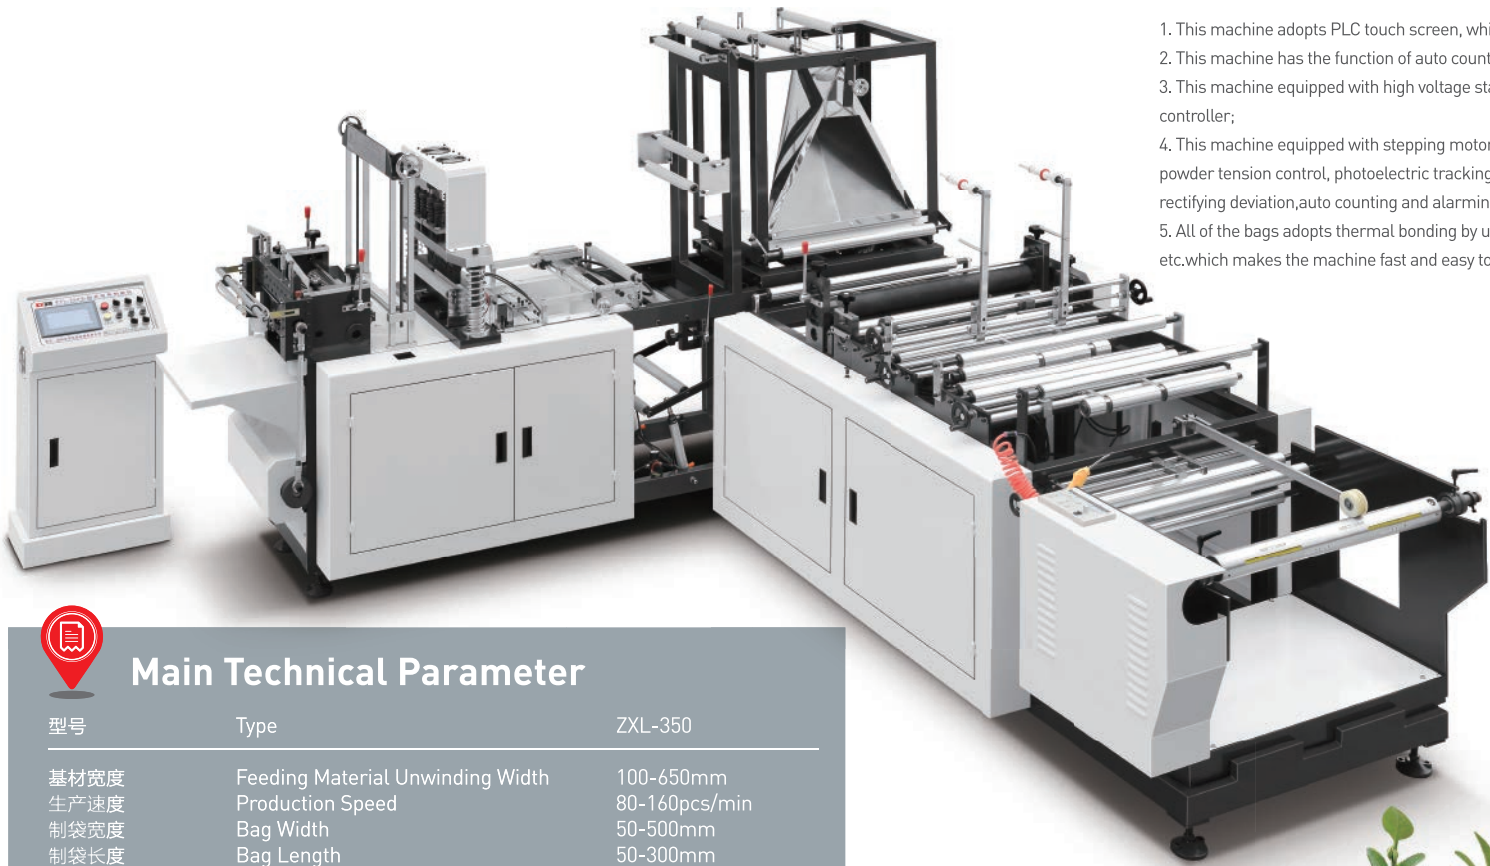

- 1. This machine adopts PLC touch screen, which can be edited.
- 2. This machine has the function of auto counting and stopping when setting number freely;
- 3. This machine equipped with high voltage static processor and auto constant temperature heating controller;
- 4. This machine equipped with stepping motor[computer fixed length]and manual unwinding magnetic powder tension control, photoelectric tracking,printing color mark track orientation,computer rectifying deviation,auto counting and alarming,auto punching etc., which make it accurate and stable.
- 5. All of the bags adopts thermal bonding by ultrasonic welding,such as bag mouth folding,side sealing etc.which makes the machine fast and easy to operate,products firm sealing,beautiful and decent.




Main Technical Parameter		
型号	Type	ZXL-350
基材宽度	Feeding Material Unwinding Width	100-650mm
生产速度	Production Speed	80-160pcs/min
制袋宽度	Bag Width	50-500mm
制袋长度	Bag Length	50-300mm
制袋厚度	Material Basis Weight	20-100g/m²
电源	Power	380V/220V
总功率	Total Power	8KW
外形尺寸	Overall Dimension	3200×3000×1800mm
机器重量	Weight	1400KG



设备品质性能不断提升，机器外观、技术参数及特点如有更改，恕不另行通知。
Equipment and improve the quality of the performance, the machine appearance, technical parameters and characteristics are subject to change without notice.

ZX-350

育苗袋无纺布制袋机
Non Woven Seedling Bag
Making Machine

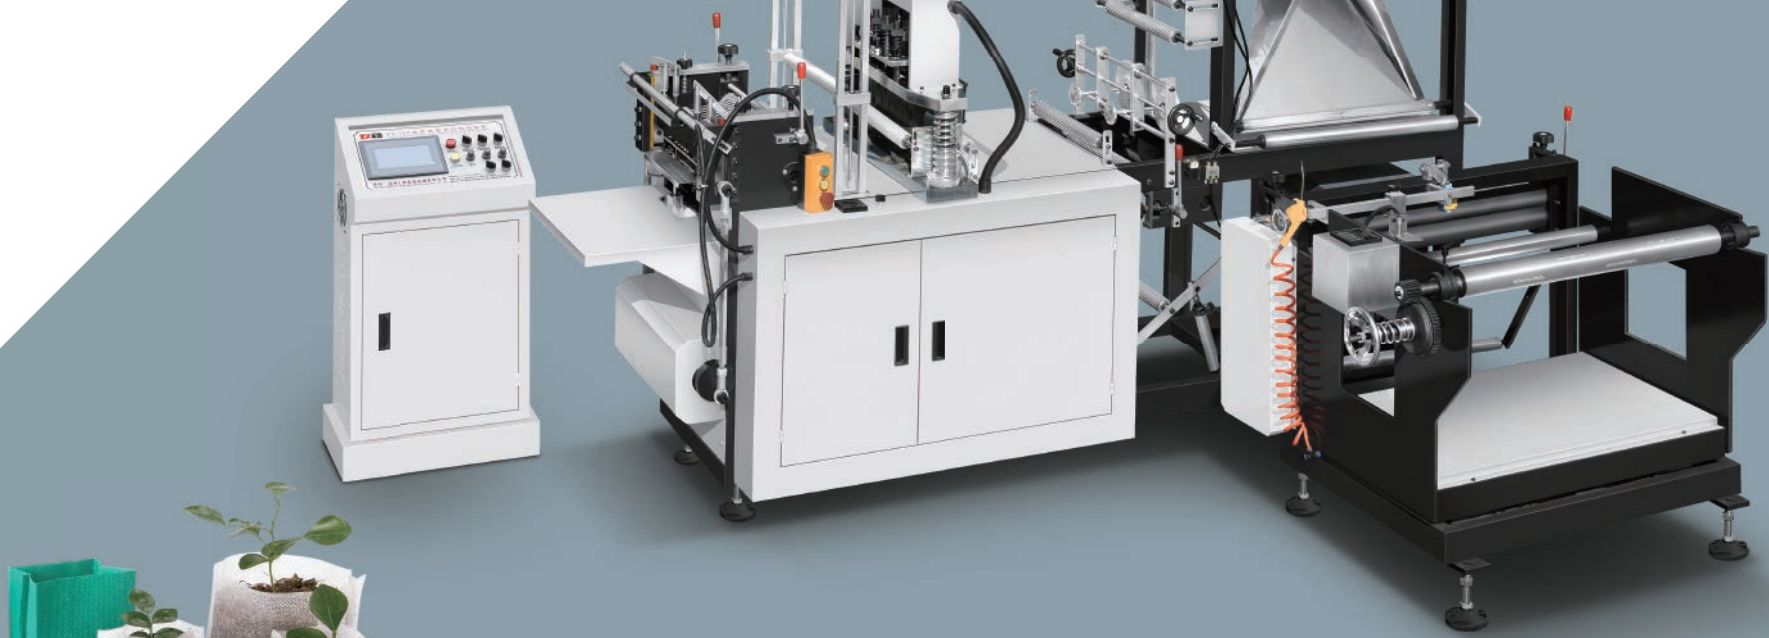

该机适用原材料为无纺布，能加工各种不同规格，不同型状的无纺布育苗袋等该机集机电为一体，运用LCD触摸屏操作。配以步进电机定长，电脑自动纠边，准确，平稳。自动计数即可设定计数报警等工控装置，使其生产的成品封线牢固，切线美观，高速效，是目前国内最先进的无纺布育苗袋机设备。

This machine is suitable for non woven fabric, which can process various non woven fabric seedling bags with different specifications and shapes. This machine is a combination of electromechanical, using LCD touch screen operation, with stepping motor fixed length, computer automatic correction, accurate, stable and automatic counting, counting alarm and other industrial control devices. The production of the finished product sealing line is firm, beautiful and high efficient. And it is the most advanced non woven seedling bag machine equipment at present.

Main Technical Parameter		
型号	Type	ZX-350
基材宽度	Material Unwinding Width	100-700mm
生产速度	Max Speed	30-150pcs/min
制袋宽度	Bag Width	50-500mm
制袋高度	Bag Height	50-280mm
布料厚度	Bag Thickness	20-100g
电源	Power	220V
总功率	Total Power	7KW
机器重量	Weight	1000KG
外形尺寸	Overall Dimension	3500×1500×1800mm


ZXL-500

背心袋无纺布制袋机

Non Woven T-shirt Bag Making Machine

适用原材料为无纺布，能加工各种不同规格的无纺布背心袋。该机集机电为一体，运用LCD触摸屏操作，配以步进式定长，光电跟踪，电脑自动纠偏，准确、平稳、自动计数，即可设定计数报警等工控装置，使其生产的成品封线牢固，切线美观。高效效，是你可以放心使用的优质环保型制袋设备。

This machine is suitable for non woven fabric, can fully automatic making non woven U cut (W cut) bag. The machine with integrated electromechanical control, using LCD touch screen operation. Machine with stepper method fixed length, photoelectric tracking, coumpter automatic positioning, computer automatic correction edge, accurate, stable. Machine with automatic counting, can setting counting alarm. Machine with automatic ironing to make the product with firmly line, beautiful tangent. High efficiency make you more rest assured to using our environmental bag making machine.

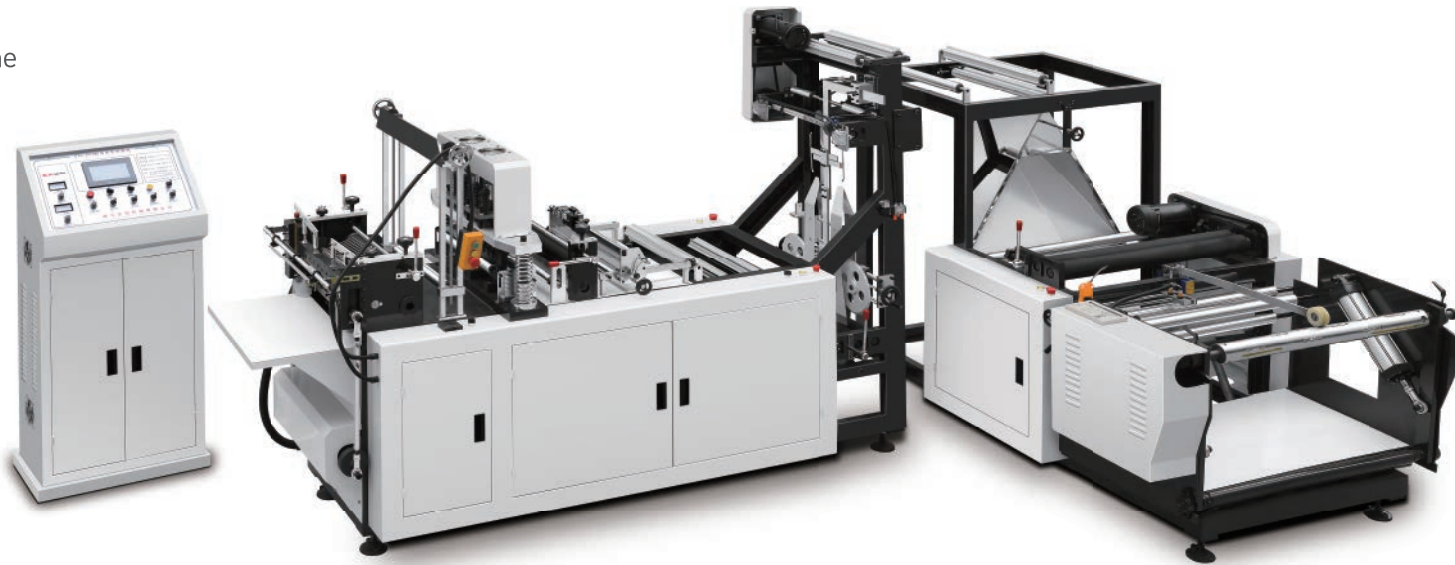

Main Technical Parameter

型号	Type	ZXL-500
基材宽度	Material Unwinding Width	450-900mm
生产速度	Max Speed	120pcs/min
制袋宽度	Bag Width	180-300mm
制袋高度	Bag Height	200-600mm
布料厚度	Bag Thickness	20-120g
电源	Power	220V/380V
总功率	Total Power	12KW
机器重量	Weight	1350KG
外形尺寸	Overall Dimension	4500×2500×2100mm

选配设备: ZX-625

液压摇臂式截料机

Optional Equipment:
Hydraulic Pressure Punching Machine



Main Technical Parameter

型号	Type	ZX-625
电机功率	Motor Power	1.1Kw
工作电压	Working Power Supply	380V
工作压力	Working Pressure	10T
压板冲程	Clamp Travel	4-75mm
工作台与压板距离	Distance Between Workable and Clamp	65-150mm
机重	Weight	400kg
外形尺寸	Outline Diameter	1000×800×1300mm



ZX-700

无纺布面粉袋自动双边缝边机

Flour Bag Automatic Double Sewing Machine



本产品针对市场上无纺布面粉袋配套使用的产品，可以独立完成自动缝纫的效果，替代了人工缝纫机，机器每小时1000个，人工一个小时200个，1: 5一个人可以独立完成2.5公斤，5公斤10公斤面粉袋缝纫，提高了生产效率，降低了生产成本。

This machine adopts mechanical, electrical, optical integration technology, suitable for sewing non woven flour bag. This machine can independently accomplish the effect of automatic sewing and replaces the manual sewing machine, The speed up to 1000pcs/hour (manual sewing machine only 200pcs/hour), one person can independently accomplish the work of 2.5KG, 5KG and 10KG non woven flour bag sewing, which largely improve the production efficiency and reduce the production cost.



Main Technical Parameter

型号	Type	ZX-700
缝纫宽度	Sewing width	250-450mm
缝纫长度	Sewing length	100-1000mm
缝纫厚度	Sewing thickness	50-100g/m²
缝纫速度	Sewing speed	15-20pcs/min
电源	Power	220V
总功率	Total Power	3KW
重量	Weight	500KG
外形尺寸	Overall Size	3000×1200×1600mm

ZX-55

超声波点焊机

Ultrasonic Welding Machine



Main Technical Parameter

型号	Type	ZX-55
输出功率	Output Power	2000w
工作电压	Working Power Supply	220v/50HZ
工作速度	Working Speed	0-15m/min
焊接宽度	Effective Breadth	0-98mm
输出频率	Output Frequency	15KHz



ZX-80

超声波花边机

Ultrasonic Lace Machine



Main Technical Parameter

型号	Type	ZX-80
输出功率	Output Power	2800w
工作电压	Working Power Supply	220v/50HZ
工作速度	Working Speed	0-15m/min
焊接宽度	Effective Breadth	0-98mm
输出频率	Output Frequency	15KHz



ZX-1300

高速挤出淋膜复合机组 High Speed Non Woven Extrusion Film Laminating Machine

本系列产品以无纺布、纸、塑膜或铝箔为基材，通过流涎一次复合成二层、三层或多层新材料，用作无纺布袋、水泥化工产品、饲料、食品、医药胶带布、涂塑纸杯、快餐盒等包装用品。

This type hot melt adhesive laminating machine is used for producing self-adhesive products, such as self-adhesive tape, double-adhesive tape, foam tape, aluminum foil tape, clean tape, masking tape.etc. it also suitable for laminating different materials, such sa non woven, filter materials, shoes materials, medical materical, label, film.etc



无纺布复合、纸塑复合、塑料复合、铝塑复合、纸铝塑复合、不干胶系列。
This machine is applicable to professional non woven, film, the paper class material intercept. widely used in bag making, printing and packaging industry.etc.

Main Technical Parameter			
型号	Type	ZX-1300	ZX-1600
模唇长度	Extrusion Die Width	1400mm	1800mm
制品宽度	Coating Width	600-1250mm	800-1500mm
最高复合速度	Max. coating Speed	10-150m/min	10-150m/min
淋膜厚度	Coating Thickness	0.01-0.03mm	0.01-0.03mm
螺杆长径比	L/d Ratio For Screw	32:1	32:1
收放卷最大直径比	Unwinding And Rewinding Roll Diameter	Φ1200mm	Φ1200mm
外形尺寸	Overall Size	1300-8000-3200mm	1300-9000-3200mm
装机功率	Total Power	50kw	65kw
复合/镜面冷辊	Mirror Cool Roll Diameter	Φ510mm	Φ510mm
适用基材	Adopt Material	Foam tape,aluminum foil tape,clean tape,masking tape.etc.	

ZXN-B1200

电脑凹版印刷机 Computer Gravure Printing Machine



Main Technical Parameter		
型号	Type	ZXN-B1200
适印材料	Kinds of Web	塑料薄膜、纸张Plastic film,paper
机械速度	Printing Speed	130m/min
印刷宽度	Max.Printing Width	800mm / 1000mm / 1200mm / 1400mm
版辊直径	Plate Roller Diameter	Φ120-300mm
收放卷直径	Max.Unwinding/Rewinding/Diameter	Φ600mm Φ800mm

1. 主电机控制，整机三段恒张力控制。

2. Φ70大无轴气顶式装版。

3. 双气缸重型刮刀装置。

4. 内式双工翻转。




5. 高节能式加热循环风。
1. The main motor control , the whole three sections of constant tension control.

2. Φ70 large non-shaft type gas cap installed version.

3. Double-cylinder heavy-duty scraper .

4. The flip-style duplex.

5. High-energy heating circulating air.

制袋机配件 NON WOVEN BAG MACHINE SPARE PARTS 	300mm封边超声波组合 Side Sealing Ultrasonic 300mm 	200mm封边超声波组合 Side Sealing Ultrasonic 200mm 	153mm封边超声波组合 Side Sealing Ultrasonic 153mm 	80*160mm打三角超声波 Box bag Triangle Ultrasonic 80*160mm 	40*40mm烫手提超声波组合 Loop handle sealing Ultrasonic 40*40mm 	70mm折边超声波组合 Ultrasonic For Folding 70mm 	威伦显示屏 WEINVIEW Display 
制袋机PLC控制器 PLC Controller Of Bag Making Machine 	变频器 Frequency Converter 	步进电机 Stepper Motor 	驱动器 Driver 	光电眼 Photoelectric Eye 	直流电机 DC Motor 	纠偏电机 Rectifying Deviation Motor 	立体卸角模具 Box Bag Punching Unit 
平口袋冲口机 Flat Bag Punching Unit 	光电纠偏系统 Photoelectric Rectifying Deviation System 	磁粉 Magnetic Powder Tension Controller 	封边模具 Square Embossing Mould 	压花模具 Round Embossing Moul 	冷切刀 Cold Cutter 	静电消除器 Electrical Static Eliminator 	PET膜 PET Film 
立体袋模具 Mould of Box Bag 	穿绳袋打孔器 Drawstring Bag Punching Unit 	版辊 The Roller 	气胀轴 Flatulence Axis 	活塞式空压机 Air Compressor 	螺杆式空压机 Screw Air Compressor 	冷干机 Dryer 	储气罐 Air Tank 



LET'S **SAVE**
THE **WORLD**
TOGETHER

我们已成为无纺布制袋机行业的领头人，
引领整个行业的技术、产品、方案、服务发展趋势。
We are the leader of the non woven bag-making machine industry.
Leading the development of technology, products, solutions and services throughout the industry.

从公司成立至今，正信专心致力于无纺布制袋机相关的技术、产品以及全方位的解决方案，覆盖到食品、鞋服、时尚、礼品、工业等多个应用领域。我们的产品总是根据使用者的实际需求而设计，可以灵活地适用于多种类型。我们将高效节能的产品解决方案送至全球各个角落；我们更通过完善的专有技术、深入地研究和产品开发、不断创造新产品，引领潮流，满足节能经济需求，减少对环境压力与影响。

Since Starting, Zhengxin Machinery Pay all attention to improve technology of non woven bag making machines and other non woven related equipments. Widely Business is now covered to food packing area, shoes packing area, clothes packing area, and use for fashion store packages, present packages, even industrial using packages. Our machines are designed based on market demands. We will keeping developing and improving new type hot machines and hopefully do any help to our world environmental protection.

